



BANDO

Power transmission belts selector

we transmit power across space

REVISED 8

REVISED 8

in oil prices would be amplified by
dollar. Inflation fears could prom
crease inter rates, which wo
That is th first-case scen
while oil st are falling
ld be us ers in
eping stra ari
mem ts p
pd in

T-T003005-E

Devoted to researching and developing the products of the 21st century.

Continue to produce state-of-the-art products with an across-the-board emphasis on innovation.


Since Bando's inception in 1906, we have pursued aggressive development policies in the power transmission belts and systems fields. Our highly capable staff develops power transmission belts as well as power transmission systems to meet the unique requirements of various types of equipment and engines. Their work contributes greatly to the emerging miniaturization technology responsible for making machines precise, smaller, lighter and more efficient.



Head Office, Kobe



OSAKA office



Nankai Plant



Wakayama Plant, Power transmission
Technical Center



Ashikaga Plant









Kakogawa Plant







Contents

	Page
Industrial Power Transmission Belts/Automotive Power Transmission Belts.	4~5
Selection Table	6~9
KING POWER Synchronous Belt (KPS)	10
Long STS Synchronous Belts	11~12
Rubber Synchronous Belts	13~15
Super Torque Synchronous Belts (STS)	16~17
(for reference)HP STS	18
Polyurethane Synchronous Belts	19~20
Fractional H.P.V Belts	21
Multiple V Belts	22
RED-S II V Belts	23
W800	24
Double V Belts	25
Narrow V Belts (Power Ace)	26~27
SP narrow	28
Variable Speed Belts	29
Polyurethane Cogged V Belts (VC-Type)	30
Polyurethane Double Cogged V Belts (DC Type)	30
Banflex	31
Banded Banflex (Banflex Scrum)	32~33
Polyurethane Open End V Belts (Cordless)	33
Banded V Belts (Power Scrum)	34~35
V Ribbed Belts (Rubber)	36
V Ribbed Belts (Polyurethane)	37
Polyurethane Round Belt (Endless)	38
Bancord (Polyurethane Open End Round Belts)	39
Flat Belts (Polyurethane)	39
PS Belts	40~41
Polyurethane Synchronous Belt TN	42
Automotive Power Transmission Belts	43~44
Application of Bando Power Transmission Belts in Different Industries	45~48
Trouble shooting	49~58

This content might change without consent. Please acknowledge it. The numerical value is not a guarantee value.


Industrial Power Transmission Belts

Belt Type	Belt Profile	Description	Page
KING POWER SYNCHRONOUS BELTS (Polyurethane)		Bando KPS Belts	10
LONG STS SYNCHRONOUS BELTS (Rubber)		Bando Long STS Belts	11~12
SYNCHRONOUS BELTS (Rubber)		Bando Synchronous Belts	13~15
SUPER TORQUE SYNCHRONOUS BELTS (Rubber)		Bando STS Belts	16~18
SYNCHRONOUS BELTS (Polyurethane)		Bando Polyurethane Synchronous Belts	19~20
V BELTS (Rubber)		Fractional H.P. and Multiple V Belts	21~22
		Bando Red-S II	23~24
		Bando Double-V	25
		Power Ace Narrow V Belts SP narrow	26~28
		Variable Speed Belts	29
V BELTS (Polyurethane)		Polyurethane Cogged V Belts (VC - type)	30






Belt Type	Belt Profile	Description	Page
V BELTS (Polyurethane)		Polyurethane Double Cogged V Belts (DC - type)	30
		Banflex	31
		Polyurethane Open Ended V Belts (Bancord V Belts)	33
BANDED BELTS (Rubber)		Power Scrum (Narrow V Type)	34~35
		Power Scrum (Multiple V type)	34~35
BANDED BELTS (Polyurethane)		Banded Banflex (Banflex Scrum)	32~33
V RIBBED BELTS (Rubber)		V Ribbed Belts	36
V RIBBED BELTS (Polyurethane)		Polyurethane V Ribbed Belts	37
ROUND BELTS (Polyurethane)		Polyurethane Round Belts (Endless)	38
ROUND BELTS (Polyurethane)		Bancord Polyurethane Open End Round Belts	39
FLAT BELTS (Polyurethane)		Polyurethane Flat Belts-Cordless	39

Industrial Power Transmission Belts

Belt Type	Belt Profile	Description	Page
PS Belts		PS Belts	40~41

Belt Type	Belt Profile	Description	Page
SYNCHRONOUS BELTS (Polyurethane)		Bando Polyurethane Synchronous Belts (TN - Type)	42

Automotive Power Transmission Belts

Belt Type	Belt Profile	Description	Page
V-BELTS (Rubber)		Wrapped Type	43~44
		Cut Edge (Raw Edge) RAF (Laminated Type)	
		Cut Edge (Raw Edge) RPF (Cogged Type)	
V RIBBED BELTS (Rubber)		Rib-Ace	
SYNCHRONOUS BELTS (Rubber)		OHC Synchronous Belt	
SUPER TORQUE SYNCHRONOUS BELTS (Rubber)		STS	

Selection Table for Bando Power Transmission Belts - 1

Find the Belt type you need in the first column. Then, reading across the page, find the belt that matches your Kilowatt, speed, elongation and/or center-to-center requirements.

TYPE OF BELT		Maximum Kilowatt (KW)				Maximum Speed (m/sec)			Maximum elongation ※1 (%)	Maximum Recommended center distance (mm)		
		UNDER 0.75	0.75~7.5	7.5~75	OVER 75	UNDER 20	20~30	OVER 30		UNDER 500	500~2000	OVER 2000
Rubber belts												
Fractional H.P.		[3L]	[4L]	[5L]		[3L] 15	[4L 5L] 30		1.5~2.0			
V Belts	Multiple		[A]	[B] [C]	[D] [E]		[A~E] 30		1.5~2.0			[A~E]
	Red-s II		[SA]	[SB] [SC]			30		1.5~2.0			
	Double-V		[AA]	[BB] [CC]			30		1.5~2.0		[AA]	[BB] [CC]
Narrow V Belts				[3V]	[5V] [8V]			40	Under 1.0		[3V]	[5V,8V]
Power Scrum (Banded Belts)	Narrow V type			[3V]	[5V] [8V]			40	Under 1.0		[3V]	[5V,8V]
	Multiple V type		[A]	[B] [C]	[D] [E]		[A~E] 30		1.5~2.0			[A~E]
Variable Speed Belts			[VA~VE]				30		1.0~1.5		[VA,VB]	[VC,VD,VE]
RIB-ACE			[PK]					[PK] 50	1.0~1.5			
V Ribbed Belts		[J]	[L]	[M]			[J,L,M] 30		1.5~2.0			
Synchronous Belts		[MXL] [XL]	[L]	[H] [XH]	[XXH]			50	Under 0.15			
STS			[S4.5M] [S5M]	[S8M]	[S14M]			60	Under 0.15			
Long Synchronous Belt (LSB-R)						10			Under 0.15			
Polyurethane Belts												
King Power Synchronous Belt (KPS)				[S8M]	[S14M]		30		Under 0.1			
Polyurethane V-Belts	FHP (2L)	[2L]				[2L]			1.5~2.0			
	Cogged V Belts (VC)	[J]				[J] 10			1.5~2.0			
	Double cogged V Belts (DC)	[J]							1.5~2.0			
	Cordless (Bancollan V Belts)								0.5~1.0			
	Open Ended (Bancord V Belts)	[M]	[A][B]						2.0~3.0			
Banflex		[3M]	[5M]	[7M]	[11M]			60	Under 0.8			
Banded Banflex			[5MS]	[7MS]	[11MS]			60	Under 0.8			
Polyurethane Flat Belts	Cordless								1.5~2.0			
Polyurethane V Ribbed Belts		[H]	[J]				25		2.0~2.5			
Polyurethane Round Belts	Endless	2φ~5φ				10			0.5~1.0			
	Open End (Bancord)	1.5φ~15φ				10			3.0~5.0			
Polyurethane Synchronous Belts		[XL][T5] [TN15]	[L] [T10]			20			Under 0.25			
Polyurethane Long Synchronous Belt (LSB-U)						10			Under 0.25			
STS (rubber)	S2M							60	Under 0.15			
	S3M							60	Under 0.15			
STS (Polyurethane)	S2M					20			Under 0.25			
	S3M					20			Under 0.25			
Polyurethane Synchronous Belts	T2.5					20			Under 0.25			
	T5					20			Under 0.25			
	TN10					20			Under 0.25			
	TN15					20			Under 0.25			
PS Belts						C series 20	B series 30	A series 90	Under 2.0			

※1 As listed above, the numerical value shows permissible range of Elongation

1. COLOR CODE

Recommended design area.

Marginal design area - contact your local Bando distributor for further engineering information.

Do not design in this area.

2. Numbers shown are maximums under normal operating conditions.

3. Letters in [] show belt type.

BELT CHARACTERISTICS

TYPE OF BELT		Speed ratio		Minimum pulley diameter (mm)				Special applications			
		Under 1:5	1:5~1:10	Under 50	50~100	100~200	OVER 200	Shock load	Horizontal drive	Backside Idler	Drive using backside of belt
Rubber belts											
V Belts	Fractional H.P.				[3L][4L]	[5L]					
	Multiple				[A]67	[B]118 [C]180	[D]300 [E]450				
Red-s II					[SA]60 [SB]80	[SC]100					
Double-V						[AA]100 [BB]180	[CC]260				
Narrow V Belts			1:10		[3V]67	[5V]150	[8V]300				
Power Scrum (Banded Belts)	Narrow V type		1:10		[3V]67	[5V]150	[8V]300				
	Multiple V type				[A]67	[B]118 [C]180	[D]300 [E]450				
Variable Speed Belts				[VA]45	[VB]60 [VC]70 [VD]80						
RIB-ACE					50						
V Ribbed Belts				[J]20	[L]75	[M]175					
Synchronous Belts			1:10	[MXL] 12teeth [XL][L] 10teeth	[H] 14teeth	[X] 22teeth [XXH] 22teeth					
STS			1:10	[S8M] 18teeth [S4.5M] 12teeth [S5M] 12teeth	[S14M] 28teeth						
Long Synchronous Belts (LSB-R)			1:10	[MXL] [XL][L] [S4.5M] [S5M]	[S8M] [H]	[X] [S14M] [XXH]					
Polyurethane Belts											
King Power Synchronous Belt (KPS)			1:10	[S8M] 18teeth	[S14M] 22teeth						
Polyurethane V-Belts	FHP (2L)			[2L]							
	Cogged V Belts (VC)			[J]16							
	Double cogged V Belts (DC)			[J]16							
	Cordless (Bancollan V Belts)										
	Open Ended (Bancord V Belts)				[M]80	[A]100 [B]150					
Banflex											
Banded Banflex (BANFLEX Scrum)			1:10	[5MS]26 [7MS]40	[11MS]63						
Polyurethane Flat Belts	Cordless			(0.6mm)t6 (1.0mm)t10							
Polyurethane V Ribbed Belts				[H]14 [J]24							
Polyurethane Round Belts	Endless			[3mmφ]18 [5mmφ]30							
	Open End (Bancord)			[3mmφ]23	[10mmφ]80						
Polyurethane Synchronous Belts			1:10	[TN15] 20teeth [XL][L][T5] 15teeth [T10] 12teeth							
Polyurethane long Synchronous Belts (LSB-U)			1:10	[S2M] [S3M] [XL][L] [T5][T10]	[S8M] [H]						
STS (rubber)	S2M		1:10	8.40							
	S3M		1:10	13.37							
STS (Polyurethane)	S2M		1:10	8.91							
	S3M		1:10	13.37							
Polyurethane Synchronous Belts	T2.5		1:10	9.55							
	T5		1:10	15.92							
	TN10		1:10	5.09							
	TN15		1:10	9.55							
PS Belts			1:10	[A5] [E8] [B11][C5]							

1. COLOR CODE

 Recommended design area.

 Marginal design area - contact your local Bando distributor for further engineering information.

 Do not design in this area.

OPERATING CONDITIONS

Oil Resistance	Acid Resistance	Alkali Resistance	Ozone Resistance	Water Resistance	Flame Resistance	Low Noise	Vibration	BELT TYPE	
Rubber belt									
								Fractional H.P.	V Belts
								Multiple, RED-S DOUBLE-V	
								Narrow V Belts	
								Narrow V type	Power Scrum (Banded Belts)
								Multiple V type	
								Variable Speed Belts	
								V Ribbed Belts	
								RIB-ACE	
								Synchronous Belts, STS	
								Long Synchronous Belt (LSB-R)	
Polyurethane Belts									
								King Power Synchronous Belts (KPS)	
								FHP (2L)	Polyurethane V-Belts
								Cogged V Belts (VC)	
								Double Cogged V Belts (DC)	
								Cordless (Bancollan V Belts)	
								Open Ended (Bancord V Belts)	
								Banflex	
								Banded Banflex	
								Cordless	Polyurethane Flat Belts
								Polyurethane V Ribbed Belts	
								Endless	Polyurethane Round Belts
								Open End (Bancord)	
								Polyurethane Synchronous Belts	
								Polyurethane Long Synchronous Belts (LSB-U)	
								S2M	STS (rubber)
								S3M	
								S2M	STS (Polyurethane)
								S3M	
								T2.5	Polyurethane Synchronous Belts
								T5	
								TN10	
								TN15	
									PS Belts

1. COLOR CODE


	Belt is perfectly suitable for conditions shown.		Belt is marginally suitable for conditions shown, but not recommendable.
	Belt is adequately suitable for conditions shown.		DO NOT apply belt in these environments.

Selection Table for Bando Power Transmission Belts - 2

Find the type of Belt you need in the first column. Then, reading across the page, find the belt that matches your operating conditions.

BELT TYPE		DRIVING CONDITIONS																			Electrical conductivity
		Ambient Temperature Range																			
		-40 (-40)	-30 (-22)	-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)	40 (104)	50 (122)	60 (140)	70 (158)	80 (176)	90 (194)	100 (212)	110 (230)	120 (248)	°C (°F)		
Rubber Belts																					
V Belts	Fractional H.P.			←──																	

BANDO KING POWER Synchronous Belt (KPS)

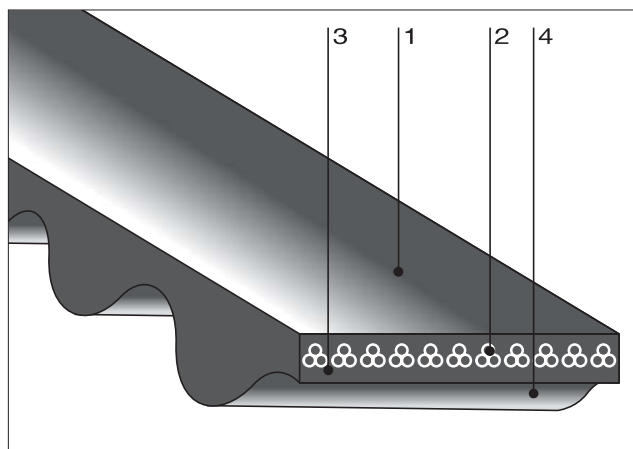


Construction

- 1: Polyurethane backing
- 2: Aramid tensile member
- 3: Polyamid fiber loaded
- 4: Polyurethane teeth

Features + Benefits


- Exceptional power transmission capability
The KPS Belt can transmit 1.2 to 5 times more power than a standard STS belt drive. This allows the same power transmission capacity to be achieved using smaller pulleys, saving space and money.
- Versatile
Utilize standard STS pulleys for a wide ratio selection.
- Clean
Wear resistant polyurethane construction reduces rubber dust.

Dimensions

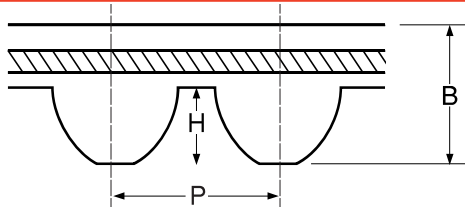

Model	P	H	B
S8M	8.00	2.86	4.80
S14M	14.00	5.00	8.50

Size mark

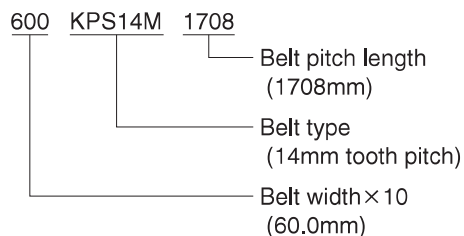

KPS8M					
Type	nominal pitch length(mm)	number of teeth	Type	nominal pitch length(mm)	teeth of number
S8M640	640	80	S8M1120	1120	140
680	680	85	1152	1152	144
720	720	90	1200	1200	150
760	760	95	1280	1280	160
800	800	100	1360	1360	170
848	848	106	1440	1440	180
896	896	112	1520	1520	190
944	944	118	1600	1600	200
1000	1000	125	1696	1696	212
1024	1024	128	1792	1792	224
1032	1032	129	1960	1960	245
1056	1056	132			


KPS14M					
Type	nominal pitch length(mm)	number of teeth	Type	nominal pitch length(mm)	teeth of number
S14M994	994	71	S14M1568	1568	112
1120	1120	80	1652	1652	118
1190	1190	85	1708	1708	122
1260	1260	90	1890	1890	135
1400	1400	100	1960	1960	140
1470	1470	105	2380	2380	170

Standard Belt width

(width mark : Belt width (mm) × 10)


width mark	150	250	400	600	800	1000	1200
Belt width (mm)	15	25	40	60	80	100	120
	S8M				S14M		

BANDO Long Synchronous Belt (Rubber)

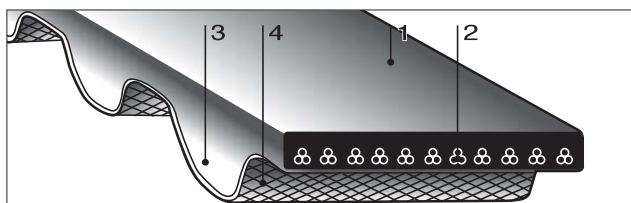

Long STS Belt

Dimensions



Unit: mm () Dimension in seamless

Model	P	h ₁	h ₂
S2M	2.0	0.76	1.31
S3M	3.0	1.14	2.10
S4.5M	4.5	1.71	2.70
S5M	5.0	1.91	3.6
S8M	8.0	3.05	5.30(6.05)
S14M	14.0	5.30	(11.30)

Construction

- 1:Chloroprene rubber backing
- 2:Glass Fiber tensile member
- 3:Chloroprene rubber teeth
- 4:Nylon canvas

Features + Benefits

Allow for synchronous power transmission and conveyance over longer spans than those available with traditional molded belts.

Compared to chain drives, these belts are lighter, produce much less noise, and are much cleaner as they need no lubrication. In factory automation applications, these belts are perfectly suited to replace chain, flat power transmission belts, and conveyor belts.


- Having no joints, they are as capable of transmission and conveyance as standard timing belts are.
- Belts can be manufactured in a length having the number of teeth that you specify.
- Belts can be manufactured to special specifications (reverse side logo, white color, etc.).

Endless


- On-site endless processing is available.
- Increasing the number of joints allows synchronous conveyance or synchronous transmission over any span length.

Open-end

- Capable of accurate reciprocating motion in indexing applications.

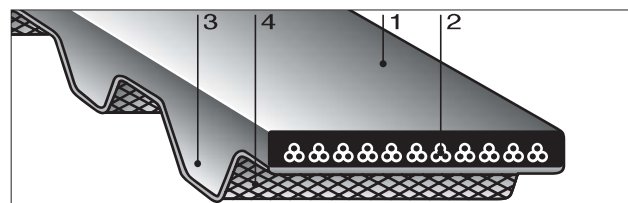

Long Synchronous Belt



Unit: mm () Dimension in seamless

Model	P	h ₁	h ₂
MXL	2.032	0.51	1.10
XL	5.080	1.25	2.25
L	9.525	1.90	3.50
H	12.700	2.30	5.30(5.30)
XH	22.225	6.30	(12.30)
XXH	31.75	9.60	(16.10)

Size mark

Seamless (Without Joints) (Synchronous Belt)

200 XH 10000
 Belt length (mm)
 Belt model (XH Model)
 Belt Nominal width (2"50.8mm)

Seamless (Without Joints) (STS Belt)

500 S14M 7850
 Belt length (mm)
 Belt Model (S14M Ttype)
 Belt Nominal width (50mm)

Open-end (Synchronous Belt)

XL 025×53m
 Belt length (m)
 Nominal width (0.25" 6.4mm)
 Belt Model (XL Model)

Open-end (STS Belt)


250 S8M×30m
 Belt length (m)
 Belt Model (S8M Model)
 Nominal width (25mm)

Standard Sizes


Seamless (Without Joints)		
Model	Standard Nominal width	Range of available belt
H	100,200,400,600,800,1000(inch×100)	4.7～30m
XH		
XXH		
S8M	250,500,1000,1500,2000,3000 (mm×10)	
S14M		

Open-end																							
Nominal width	619	025	031	037	050	075	100	150	200	300	Nominal width	50	60	70	80	100	140	150	200	250	300	400	500
Width	4.8	6.4	7.9	9.5	12.7	19.1	25.4	38.1	50.8	76.2	Width	5	6	7	8	10	14	15	20	25	30	40	50
MXL	42	31	25	41	30						S2M	40	35	30	50								
XL		53	43	35	26	33					S3M	50	40										
L				49	32	47					S4.5M		45			40	28						
H					42	31	40	28	17		S5M				40	40		40	30	24			
											S8M				40			50	40	30	53	38	29

BANDO Long Synchronous Belt (Polyurethane)

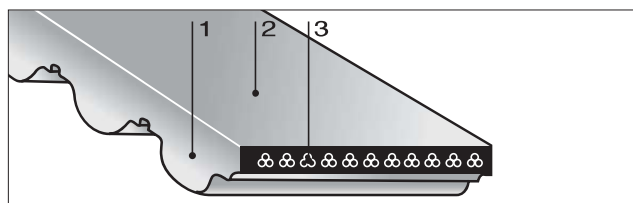


Bancolan Long STS Belt

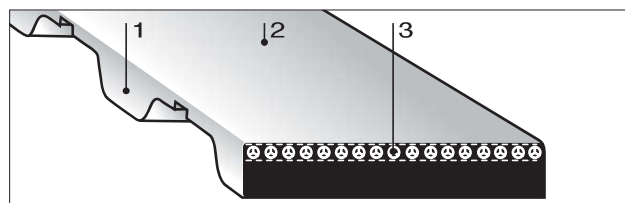

Bancolan Long Synchronous Belt

Dimensions



Unit: mm () Dimension in seamless

Model	P	h1	h2
S2M	2.00	0.76	1.40
S3M	3.00	1.14	2.00
S5M	5.00	1.77	3.20
S8M	8.00	2.85	5.00

Construction

- 1: Polyurethane teeth
- 2: Polyurethane backing
- 3: Core wire

Features + Benefits


The polyurethane construction of these long span belts make them ideally suited for synchronous transmission and conveyance in food processing machinery and other applications requiring a clean, dust-free drive.

- long-span belts capable of synchronous transmission and synchronous conveyance.

Open-end

- Capable of accurate reciprocating motion in indexing applications.


Size material code

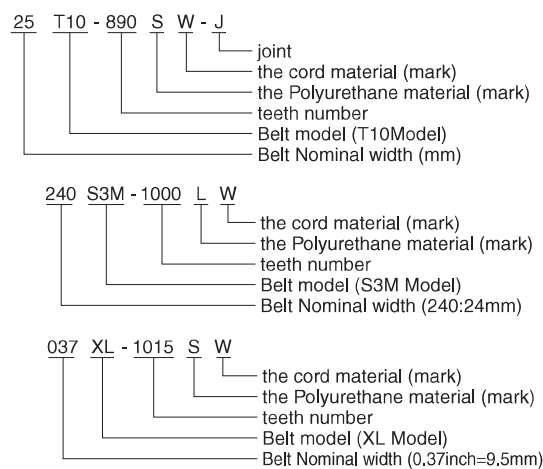

Standard Sizes

Endless (With Joints)					Openend			
Model	Standard Nominal width	Maximum Nominal width	Maximum length(m)	Minimum length(m)	Model (m)	Standard Nominal width	Maximum Nominal width	Max length(m)
S5M	100,150,200,250,300,400,500	50(500)	50	0.5	S2M	50,100,150,200,250,300,350,400	40(400)	60
S8M	150,200,250,300,400,500	100(1000)	30	1.0	S3M	60,120,180,240,300,360,420,480	48(480)	60
XL	025,031,037,050,075,100,150,200	50.8(200)	50	0.5	S5M	100,150,200,250,300,400,500	50(500)	50
L	050,075,100,150,200	50.8(200)	50	0.5	S8M	150,200,250,300,400,500,750,1000	100(1000)	30
H	075,100,150,200,300,400	101.6(400)	50	0.5	XL	025,031,037,050,075,100,150,200	50.8(200)	50
T5	10,15,20,25,30,40,50	50	50	0.5	L	050,075,100,150,200	50.8(200)	50
T10	15,20,25,30,40,50,75,100	100	50	0.5	H	075,100,150,200,300,400	101.6(400)	50
				2.0	T5	10,15,20,25,30,40,50	50	50
					T10	15,20,25,30,40,50,75,100	100	50


BANDO RUBBER SYNCHRONOUS BELT

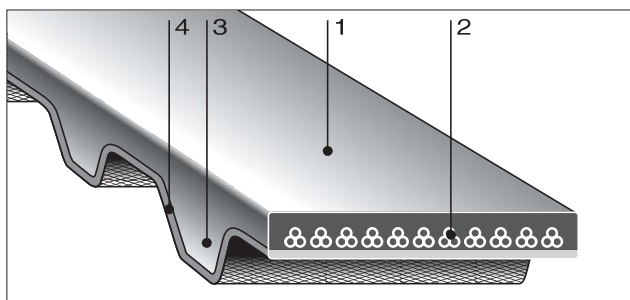

Construction

- 1: Chloroprene rubber backing.
- 2: Glass Fiber tensile member.
- 3: Chloroprene rubber tooth.
- 4: Nylon canvas

Dimensions

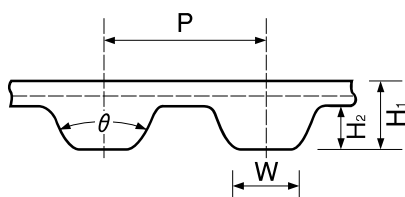

		P	W	H ₁	H ₂	θ
MXL	Mini Synchro	2.032mm (0.080")	(0.76) 0.030	(1.1) 0.043	(0.51) 0.020	40°
XL	Extra Light	5.08mm (0.200")	(1.35) 0.054	(2.3) 0.09	(1.27) 0.050	50°
L	Light	9.525mm (0.375")	(3.2) 0.128	(3.6) 0.14	(1.91) 0.075	40°
H	Heavy	12.7mm (0.500")	(4.4) 0.175	(4.3) 0.17	(2.29) 0.090	40°
XH	Extra Heavy	22.225mm (0.875")	(8.0) 0.313	(11.2) 0.44	(6.35) 0.250	40°
XXH	Double Extra Heavy	31.75mm (1.250")	(12.2) 0.477	(15.7) 0.62	(9.53) 0.375	40°

Standard Belt Width

Belt	BELT WIDTH													
	1/8	3/16	1/4	5/16	3/8	1/2	3/4	1	1-1/2	2	3	4	5	6
inch	1/8	3/16	1/4	5/16	3/8	1/2	3/4	1	1-1/2	2	3	4	5	6
mm	3.2	4.8	6.4	7.9	9.5	12.7	19.0	25.4	38.1	50.8	76.2	101.6	127.0	152.4
MXL	●	●	●		●	●								
XL			●	●	●	●	●	●	●	●				
L						●	●	●	●	●				
H							●	●	●	●	●			
XH										●	●	●	●	●
XXH										●	●	●	●	●

Features

- Non-slip
Accurate tooth dimensions and minimal elongation virtually eliminate slippage and speed variation.
- No maintenance
No lubrication is required.
- No high initial tension, thus keeping the bearing load very low.
- Space saving
Utilizes small pulleys and short center distances.

Size code

(MXL)



140 MXL 9.5
 — Belt width in mm
 — Belt pitch 0.080"
 — Number of teeth

(XL, L, H, XH, XXH)

140 XL 025
 — Belt width 0.25" (1/4")
 — Belt pitch 1/5"
 — Pitch length in inches multiplied by ten (14"x10=140)

Special Applications

Bando Synchronous Belts are also available in the following special specifications.

Description	Application
Flexible Synchronous Belt	Developed for business machines which need maximum flexibility. Only XL available.
Special Pitch Synchronous Belt	Special pitch tooth dimensions are available.
Double Teeth Synchronous Belt	DXL, DL and DH AVAILABLE, DS2M, DS3M, DS4.5M, DS8M, DS14M 
Steel Cord Synchronous Belt	L, H, XH, and XXH available
Non-Marking Back Synchronous Belt	For special applications such as conveyors, food handling systems, etc.
Oil Resistant Synchronous Belt	Driven in oil contaminating conditions.
Heat Resistant Synchronous Belt	Operating in ambient temperature up to 248°F (120°C)
High Electric Resistant Synchronous Belt	When an electric resistance of 6MΩ or more is required.
Low Noise Synchronous Belt	For applications where heavy-duty belt (Type H or heavier) is too noisy.
Special Construction Synchronous Belt	(1) Thicker top rubber: for applications other than power transmission. (2) With top designed for conveying substances. 
Wide Synchronous Belt	Sleeved Synchronous Belt in multiples of standard width.
Open-Ended Synchronous Belt (Long length)	For special applications. (XL, L, H-type only available at present) S2M, S3M, S4.5M, S8M

BANDO RUBBER SYNCHRONOUS BELTS


Standard Sizes

BELT TYPE	PITCH	BELT NUMBER
MXL ※ (Rubber)	2.032mm (0.080")	44, 45, 48, 50, 52, 53, 54, 55, 56, 57, 59, 60, 61, 62, 63, 64, 65, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 108, 109, 110, 112, 114, 115, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 134, 135, 137, 138, 140, 142, 144, 145, 146, 148, 150, 151, 155, 158, 159, 160, 162, 163, 164, 165, 169, 170, 175, 177, 180, 184, 188, 190, 192, 195, 196, 200, 204, 205, 208, 210, 212, 215, 220, 221, 222, 224, 225, 226, 228, 230, 232, 234, 236, 239, 240, 245, 248, 249, 250, 251, 255, 256, 260, 262, 265, 268, 271, 273, 275, 280, 281, 285, 288, 290, 295, 297, 300, 305, 308, 310, 312, 315, 318, 320, 323, 326, 328, 330, 332, 334, 336, 337, 347, 350, 354, 355, 358, 359, 360, 364, 365, 371, 372, 380, 388, 397, 400, 402, 405, 410, 413, 425, 431, 434, 435, 440, 448, 453, 464, 468, 473, 475, 480, 487, 493, 498, 500, 516, 522, 524, 525, 535, 550, 591, 612, 665
XL (Rubber)	5.08mm (0.200")	50, 60, 64, 68, 70, 72, 74, 76, 78, 80, 84, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 188, 190, 194, 196, 198, 200, 202, 206, 208, 210, 212, 214, 216, 220, 222, 224, 228, 230, 234, 240, 244, 248, 250, 260, 262, 266, 270, 276, 280, 282, 290, 300, 310, 314, 320, 322, 330, 340, 344, 348, 352, 356, 360, 364, 370, 372, 376, 384, 386, 388, 390, 396, 400, 408, 424, 430, 450, 456, 460, 470, 490, 496, 510, 540, 564, 592, 608, 630, 638, 686, 828, 860, 888, 900, 908, 914, 926, 1014, 1020

BELT TYPE	PITCH	BELT NUMBER
L (Rubber)	9.525mm (0.375")	98, 109, 124, 135, 150, 165, 169, 172, 187, 203, 210, 218, 225, 240, 248, 255, 263, 270, 277, 285, 300, 304, 315, 320, 322, 334, 337, 345, 367, 375, 382, 390, 394, 420, 427, 436, 439, 446, 450, 465, 480, 510, 514, 525, 540, 548, 581, 600, 605, 619, 630, 640, 653, 660, 697, 728, 731, 767, 780, 788, 806, 855, 863, 881, 915, 919, 938, 1294
H (Rubber)	12.700mm (0.5")	185, 225, 230, 240, 245, 270, 280, 300, 310, 315, 320, 330, 340, 350, 360, 370, 375, 390, 400, 410, 420, 430, 450, 465, 480, 490, 510, 530, 540, 560, 565, 570, 580, 600, 605, 630, 640, 650, 660, 680, 700, 730, 750, 760, 770, 800, 810, 820, 840, 850, 860, 880, 900, 950, 985, 1000, 1020, 1050, 1100, 1130, 1140, 1250, 1325, 1350, 1400, 1680, 1700
XH (Rubber)	22.225mm (0.875")	507, 560, 630, 700, 735, 770, 840, 875, 927, 980, 1120, 1260, 1400, 1540, 1750
XXH (Rubber)	31.750mm (1.250")	700, 800, 900, 1000, 1200, 1400, 1600, 1800, 1915

※ For MXL(only) belt number equals number of teeth all others refer to pitch length in inches.

BANDO SUPER TORQUE SYNCHRONOUS (STS) BELTS

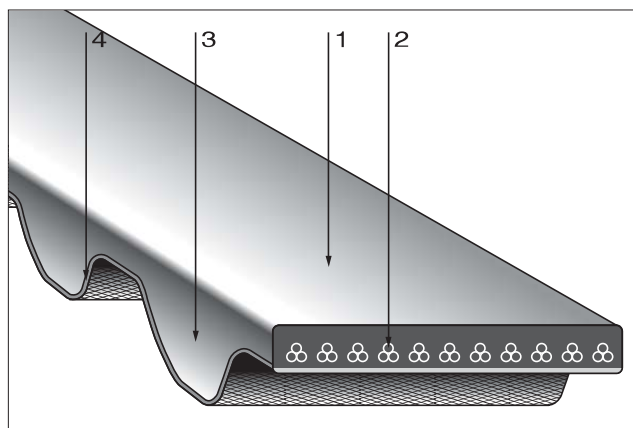

Features

- High torque capacity drive
Unique tooth profile enables the belt to transmit higher power.
- Lower noise level
Smoother tooth engagement and direct contact of tooth top with the pulley grooves' enables the belt to run quietly even at high speeds.
- Long service life
As the belt tooth meshes with the pulley grooves, the cord lay forms an almost true circle. This minimizes the cantilever effect on the cords, resulting in reduced bending fatigue and longer service life.
- No maintenance
No lubrication or retension required.
- Space saving
Due to Higher Power Transmission Capacity, the belt width and the pulley width can be designed narrower. This means machine space can be reduced and the machine can be designed more compactly.


Standard Belt Width

Width Mark	40	60	100	150	200	250	400	600	800	1000	1200
Width(mm)	4	6	10	15	20	25	40	60	80	100	120
S2M	●	●	●	●	●						
S3M		●	●	●							
S4,5M		●	●	●							
S5M			●	●	●	●					
S8M				●		●	●	●			
S14M							●	●	●	●	●

Construction


- 1:Chloroprene rubber backing
- 2:Glass Fiber tensile member
- 3:Chloroprene rubber tooth
- 4:Nylon canvas

Dimensions

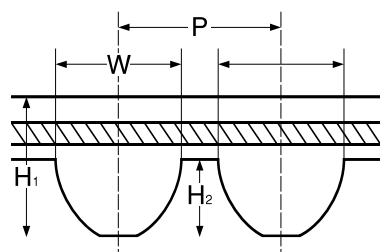

Type	P	H ₁	H ₂	W
S2M	2.0mm (0.078")	1.31mm (0.052")	0.76mm (0.029")	1.3mm (0.051")
S3M	3.0mm (0.118")	2.1mm (0.083")	1.14mm (0.044")	1.95mm (0.076")
S4.5M	4.5mm (0.177")	2.70mm (0.106")	1.71mm (0.067")	2.93mm (0.115")
S5M	5.0mm (0.197")	3.61mm (0.142")	1.91mm (0.075")	3.25mm (0.128")
S8M	8.0mm (0.315")	5.3mm (0.212")	3.05mm (0.120")	5.20mm (0.205")
S14M	14.0mm (0.551")	10.2mm (0.402")	5.30mm (0.209")	9.10mm (0.358")

Size code

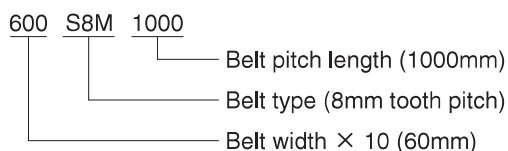


BANDO SUPER TORQUE SYNCHRONOUS (STS) BELTS

Standard Belt Length

BELT TYPE	BELT PITCH (mm)	BELT NUMBER (PITCH LENGTH mm)
S2M (Rubber)	2.0	86, 88, 90, 92, 94, 98, 100, 102, 104, 106, 108, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 138, 140, 142, 144, 148, 150, 152, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 190, 192, 194, 198, 200, 202, 204, 210, 212, 214, 216, 218, 220, 222, 224, 226, 230, 232, 234, 236, 238, 240, 242, 244, 248, 250, 254, 256, 258, 260, 262, 264, 266, 272, 274, 278, 280, 282, 284, 286, 288, 290, 292, 296, 300, 308, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 338, 340, 342, 344, 350, 360, 364, 370, 372, 374, 376, 380, 386, 390, 396, 400, 406, 408, 416, 420, 426, 428, 438, 448, 452, 454, 460, 468, 474, 486, 490, 494, 500, 520, 530, 352, 540, 550, 558, 560, 572, 580, 594, 596, 600, 604, 606, 620, 630, 632, 652, 656, 668, 676, 692, 700, 710, 742, 752, 754, 766, 796, 800, 810, 826, 898, 900, 940, 946, 950, 984, 1000, 1032, 1036, 1066, 1074, 1100, 1110, 1136, 1154, 1166, 1224, 1228
S3M (Rubber)	3.0	123, 129, 144, 150, 156, 159, 162, 168, 171, 174, 177, 180, 183, 186, 189, 192, 195, 198, 201, 204, 207, 210, 213, 219, 222, 225, 228, 234, 237, 240, 243, 246, 249, 252, 255, 258, 264, 267, 270, 273, 276, 279, 282, 285, 288, 291, 297, 300, 303, 309, 312, 315, 318, 324, 327, 330, 333, 336, 339, 342, 351, 354, 360, 363, 366, 369, 372, 375, 378, 384, 387, 390, 396, 399, 402, 405, 408, 417, 420, 423, 426, 432, 438, 444, 447, 453, 459, 468, 471, 474, 480, 486, 489, 492, 498, 501, 507, 513, 516, 519, 522, 525, 534, 537, 540, 549, 552, 555, 564, 573, 579, 588, 597, 600, 609, 621, 633, 648, 657, 660, 666, 681, 690, 699, 726, 735, 741, 750, 768, 771, 789, 804, 810, 825, 852, 882, 885, 888, 900, 918, 927, 936, 990, 1119, 1134, 1146, 1188, 1299, 1419, 1530
S4.5M (Rubber)	4.5	162, 180, 198, 225, 239, 252, 279, 284, 315, 324, 351, 383, 396, 450, 491, 504, 518, 558, 563, 612, 630, 711, 729, 801, 1031, 2111
S5M (Rubber)	5.0	225, 230, 255, 275, 295, 300, 320, 325, 350, 375, 380, 390, 400, 410, 420, 425, 435, 440, 445, 450, 475, 490, 500, 520, 525, 550, 560, 565, 570, 575, 600, 625, 635, 645, 650, 665, 670, 675, 695, 700, 710, 725, 740, 750, 765, 770, 775, 800, 810, 830, 850, 860, 870, 900, 920, 940, 950, 965, 975, 1000, 1025, 1050, 1125, 1135, 1145, 1195, 1225, 1250, 1260, 1270, 1295, 1350, 1420, 1595, 1715, 1800, 2000
S8M (Rubber)	8.0	352, 384, 408, 424, 456, 480, 520, 528, 560, 584, 600, 632, 640, 656, 672, 680, 712, 720, 728, 760, 800, 824, 840, 848, 880, 888, 896, 920, 944, 960, 976, 984, 1000, 1032, 1040, 1056, 1096, 1120, 1136, 1152, 1160, 1184, 1192, 1200, 1216, 1224, 1240, 1248, 1272, 1280, 1296, 1312, 1344, 1352, 1384, 1392, 1400, 1424, 1440, 1480, 1520, 1552, 1600, 1728, 1760, 1776, 1800, 1808, 1880, 1952, 2000, 2120, 2160, 2240, 2304, 2400, 2496, 2560, 2600, 2800, 2880, 2944, 3200, 3600, 3720, 3904, 4400
S14M (Rubber)	14.0	1008, 1120, 1190, 1246, 1400, 1540, 1610, 1652, 1778, 1806, 1890, 1904, 2002, 2100, 2240, 2310, 2380, 2450, 2506, 2590, 2660, 2800, 3150, 3248, 3500, 3556, 3850, 4004, 4060, 4326, 4508, 5012

BANDO High-Performance STS Belt (HP-S5M.S8M.S14M Type)

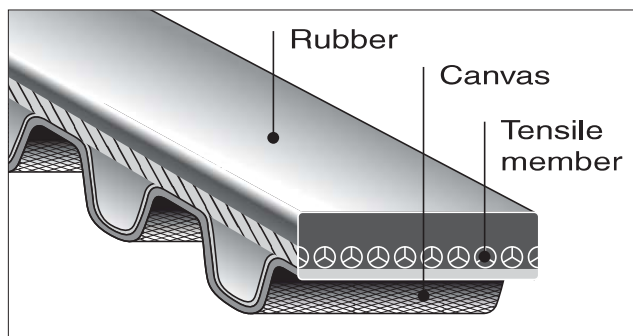

Features

- Exceptionally high power transmission capacity
This "high performance STS belt" achieves power transmission approximately 1.5 to 2 times as high as that with conventional STS belts.
- Compact design
The high power transmission can minimize the width of belt, thus making system design as compact as possible.
- Low noise level
The high power transmission can minimize the width of belt, thus accomplishing a low noise operation.

*Conventional standard pulleys are also applicable.

*Standard belt sizes are available for the production of this belt.

Concept

Responding to needs for "Energy saving" and "High power transmission" on industrial machinery in these years, we at BANDO have developed a "High-performance STS belt" capitalizing on our time-proven technology and experience.

Construction & Members

Rubber:

Using synthetic rubber having less tooth deformation and a high level of hardness.

Tensile member:

Using tensile member with considerations given to dimensional stability and flexibility.


Tooth canvas:

The tooth canvas has asperities on the surface and provides a low friction coefficient, accomplishing a low noise level of operation.

Furthermore, the S14M Type provides two-ply tooth canvas, which enables further reductions in noise levels and improvement in durability.

The HP-S5M Type is only available for clean specification.

BANDO POLYURETHANE SYNCHRONOUS BELTS

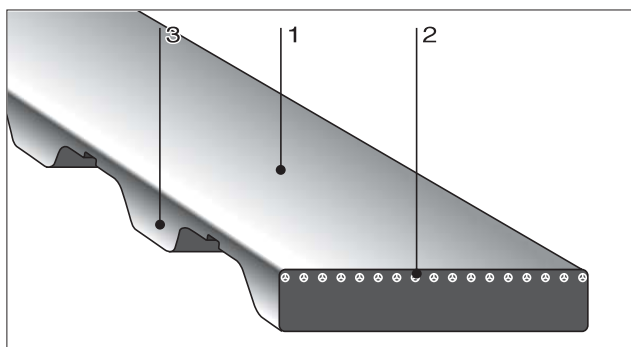


Construction

- 1: Polyurethane backing
- 2: Steel cord tensile members
- 3: Polyurethane teeth

Features

- Non-slip
Accurate tooth dimension and steel cord ensures minimal stretching, no slippage and constant speeds.
- High oil and ozone resistance
- Special backside surfaces are available.
Bando can mold virtually any special configuration on the belt's backside surface. (see examples below)



Size mark

(MXL)

140 MXL 9.5
 — Belt width in mm
 — Belt pitch 2.032mm (0.080")
 — Number of teeth


(T2.5, T5, T10)

10 T5 - 280
 — Pitch length mm
 — Belt pitch 5mm
 — Belt width in mm

We recommend Bando Polyurethane Synchronous Belts are ideal for the following conditions.

- For improved performance from the belt i.e. as a conveyor or print drive, special shapes or indications can be formed on the backside.
- High oil or ozone resistance.
- High shock load applications.

Dimensions

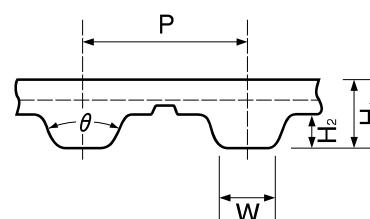

Type	P	W	H1	H2	θ
MXL	2.032mm (0.080")	0.76mm (0.030")	1.1mm (0.043")	0.51mm (0.020")	40°
XL	5.08mm (0.200")	1.35mm (0.053")	2.25mm (0.089")	1.25mm (0.049")	50°
L	9.525mm (0.375")	3.2mm (0.126")	3.5mm (0.138")	1.9mm (0.075")	40°
T2.5	2.5mm (0.098")	1.0mm (0.039")	1.3mm (0.051")	0.7mm (0.028")	40°
T5	5.0mm (0.197")	1.80mm (0.071")	2.2mm (0.087")	1.2mm (0.047")	40°
T10	10.0mm (0.394")	3.5mm (0.138")	4.5mm (0.177")	2.5mm (0.098")	40°

(XL, L)


140 XL 025
 — Belt width 6.4mm (0.25")
 — Belt pitch 5.08mm (0.20")
 — Pitch length in inches multiplied by ten
 (14" × 10 = 140)

BANDO POLYURETHANE SYNCHRONOUS BELTS

Standard Sizes

BELT TYPE	P(mm)	NOMINAL WIDTH	BELT NUMBER (PITCH LENGTH mm)
S2M (Polyurethane)	2.0	40、60、100	76、78、80、86、90、92、100、102、106、110、112、114、116、120、122、126、128、138、140、142、144、148、158、160、164、166、168、170、172、176、180、184、186、190、200、206、214、216、218、220、224、230、234、236、238、240、250、256、258、260、264、266、280、290、296、300、314、316、320、334、340、354、360、370、380、396、400、436、440、448、454、460、474、480、488、494、500、504、520、544、548、560、580、600、620、630、654、710、754、790、800、828、900、976、1000
S3M (Polyurethane)	3.0	60、100、150	120、144、150、159、162、171、174、177、186、192、195、201、204、210、213、219、222、225、234、237、240、246、252、255、264、267、270、276、285、300、312、318、327、339、342、354、360、378、384、390、396、402、405、417、420、432、447、453、459、486、501、504、507、513、516、519、537、564、588、600、609、633、660、666、681、699、750、765、774、789、804、810、885、900、936、951、1005、1050、1146、1260、1383、1596、1800、2100
BELT TYPE	P(mm)	NOMINAL WIDTH	BELT NUMBER (NO OF TEETH)
T2.5 (Polyurethane)	2.500	3、5、7、10、13	120、145、160、177.5、200、230、245、265、285、305、317.5、330、380、420、480、492.5、500、600、620、650、780、915、950
T5 (Polyurethane)	5.000	5、10、15、20	165、185、200、215、220、225、245、250、255、260、270、275、280、295、300、305、325、330、340、350、355、365、375、390、400、410、420、425、450、455、465、475、480、500、510、525、545、550、560、575、600、610、620、630、640、650、660、675、690、695、700、720、750、780、800、815、840、850、900、940、990、1000、1075、1100、1215、1380、1440
T10 (Polyurethane)	10.000	15、20、25、30、50	260、370、400、410、440、450、500、530、560、610、630、660、690、700、720、750、780、810、840、880、890、900、920、960、970、980、1000、1010、1080、1110、1140、1150、1210、1240、1250、1300、1320、1350、1390、1400、1420、1440、1450、1460、1500、1560、1610、1750、1780、1880、1960、2250
MXL (Polyurethane)	2.032	3.2、4.8、6.4、9.5、12.7	37、40、41、42、45、48、50、52、53、54、55、56、57、60、63、65、67、68、70、71、72、73、75、76、79、80、81、82、83、85、87、88、90、91、94、95、97、98、100、102、103、106、110、112、114、115、118、120、123、125、126、128、130、132、134、136、140、144、150、155、157、160、165、170、175、180、184、190、195、200、205、210、212、215、220、225、230、236、240、250、255、260、265、270、280、295、300、305、310、330、336、340、347、350、360、453、468、579、660
BELT TYPE	P(mm)	NOMINAL WIDTH	BELT NUMBER (PITCH LENGTH INCHES×10)
XL (Polyurethane)	5.080	025、031、037、050、075	60、70、80、90、96、100、110、114、120、130、140、150、154、156、160、166、168、170、176、180、190、198、200、202、210、212、220、230、236、240、250、254、260、290、300、320、330、376、396、414、430、460、478、480、490、512、564、630、670、730
L (Polyurethane)	9.525	050、075、100、150、200	124、150、165、187、210、225、240、255、270、285、300、322、345、360、367、390、420、450、480、510、540、600

BANDO FRACTIONAL H.P. V-BELTS AND MULTIPLE V BELTS

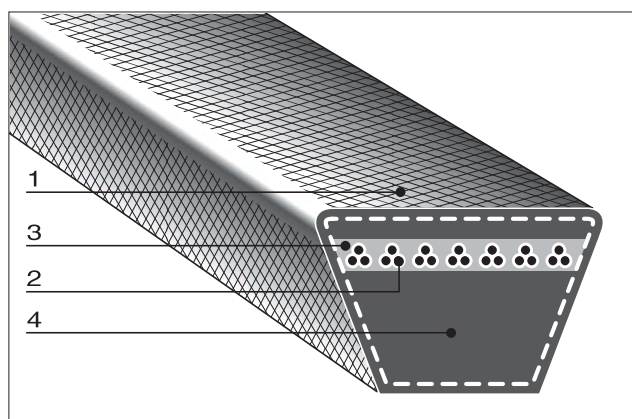

Construction

- 1:Rubber impregnated canvas
- 2:Polyester tensile members
- 3:Chloroprene insulation rubber
- 4:Chloroprene compression rubber

Features


FHP V-BELTS

Bando FHPV-Belts are built for maximum tension control, drive uniformity and long life, with minimum heat build-up and stretching on low horsepower electric motors and gasoline engines. They are designed for high speed and short center distance.

MULTIPLE V-BELTS

For multiple drive, high speed and high torque drives on light or heavy industrial or automotive machinery. Bando Multiple V-Belts have exceptional length stability and drive uniformity. Rigorous testing has shown these Premium Quality Belts to have twice the service life and significantly greater transmission capacity than most other multiple V Belts.



Dimensions



		Top width a	Thickness b	Angle θ
FHP	3L	10.0mm (0.38")	5.5mm (0.22")	40°
	4L	13.0mm (0.50")	8.0mm (0.31")	40°
	5L	17.0mm (0.66")	9.0mm (0.38")	40°
Multiple	A	12.7mm (0.50")	8.0mm (0.31")	40°
	B	16.7mm (0.66")	10.7mm (0.41")	40°
	C	22.2mm (0.88")	13.5mm (0.53")	40°
	D	32.0mm (1.25")	20.0mm (0.75")	40°
	E	40.0mm (1.50")	25.5mm (0.91")	40°

BANDO FRACTIONAL H.P.V-BELTS AND MULTIPLE V BELTS

Size mark

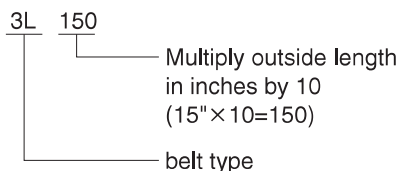


Standard Sizes

※These sizes are in conformity to RMA.

Type	Size code
3L	150, 160, 170, 180, 190, 200, 210, 220, 230, 240, 250, 260, 270, 280, 290, 300, 310, 320, 330, 340, 350, 360, 370, 380, 390, 400, 410, 420, 430, 440, 450, 460, 470, 480, 490, 500, 510, 520, 530, 540, 550, 560, 570, 580, 590, 600, 610, 620
4L	170, 180, 190, 200, 210, 220, 230, 240, 250, 260, 270, 280, 290, 300, 310, 320, 330, 340, 350, 360, 370, 380, 390, 400, 410, 420, 430, 440, 450, 460, 470, 480, 490, 500, 510, 520, 530, 540, 550, 560, 570, 580, 590, 600, 610, 620, 630, 640, 650, 660, 670, 680, 690, 700, 710, 720, 730, 740, 750, 760, 770, 780, 790, 800, 810, 820, 830, 840, 850, 860, 870, 880, 890, 900, 910, 920, 930, 940, 950, 960, 970, 980, 990, 1000
5L	230, 240, 250, 260, 270, 280, 290, 300, 310, 320, 330, 340, 350, 360, 370, 380, 390, 400, 410, 420, 430, 440, 450, 460, 470, 480, 490, 500, 510, 520, 530, 540, 550, 560, 570, 580, 590, 600, 610, 620, 630, 640, 650, 660, 670, 680, 690, 700, 710, 720, 730, 740, 750, 760, 770, 780, 790, 800, 810, 820, 830, 840, 850, 860, 870, 880, 890, 900, 910, 920, 930, 940, 950, 960, 970, 980, 990, 1000
A	20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 105, 110, 112, 120, 128, 136, 144, 158, 173, 180
B	25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 100, 101, 103, 105, 108, 111, 112, 120, 124, 128, 133, 136, 144, 158, 162, 173, 180, 195, 210, 225, 240, 255, 270, 285, 300, 315
C	51, 60, 68, 75, 81, 85, 90, 96, 105, 109, 112, 115, 120, 128, 136, 144, 150, 158, 162, 173, 180, 195, 210, 225, 240, 255, 270, 285, 300, 315, 330, 345, 360, 390, 420, 450, 480
D	120, 128, 144, 158, 162, 173, 180, 195, 210, 225, 240, 255, 270, 285, 300, 315, 330, 345, 360, 390, 420, 450, 480, 540, 600
E	180, 195, 210, 240, 270, 300, 330, 360, 390, 420, 480, 540, 600

BANDO RED S II V-BELTS

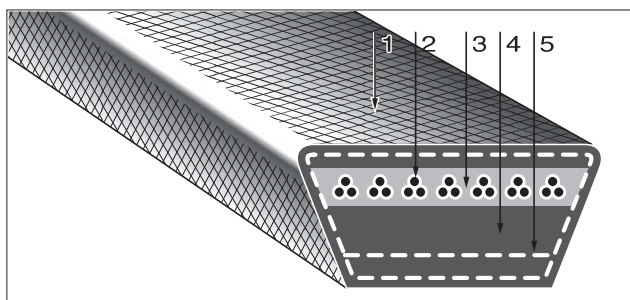


Construction

- 1: Rubber impregnated canvas
- 2: Polyester tensile members
- 3: Chloroprene insulation rubber
- 4: Chloroprene compression rubber

Features + Benefits

- Designed specifically for reverse-bend drive by positioning tensile members closer to the neutral axis and by making the belt thickness a little thinner than that of Conventional Multiple V-Belts A, B, & C Sections.
- Particularly suitable to agricultural machinery such as combine harvester and garden tiller where belts are often driven with backside idler.

Dimensions




Type	Top width a	Thickness b	Angle θ
SA	12.7mm (0.5")	7.0mm (0.27")	40°
SB	16.7mm (0.67")	9.0mm (0.35")	40°
SC	22.2mm (0.87")	11.0mm (0.43")	40°

Service Life Comparison


Specific Driving Conditions	Red-SII Life Criteria	Multiple V-Belt Life Criteria
reverse-bend drive	450	100
oil contamination	380	100
ambient temperature 70°C Degrees	450	100


Size mark



Standard Sizes

Belt type	Axb (mm)	Belt pitch length in inches
SA	12.7×7.0	20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 102 105 108 110 112 115 118 120 122 125 128 130 135 140 145 150 155 160 165 170 180 200 205 210 220 225 230 235 240 250
SB	16.7×9.0	22 25 26 27 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 102 105 108 110 112 115 118 120 122 125 128 130 132 135 138 140 145 150 155 160 165 170 180 190 200 210
SC	22.2×11.0	35 39 40 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 62 63 64 65 66 67 68 69 70 72 73 74 75 76 77 78 79 80 81 82 85 86 87 88 89 90 94 95 96 99 100 102 105 108 110 112 115 118 120 122 125 128 130 134 137 139 140 145 150 167 175

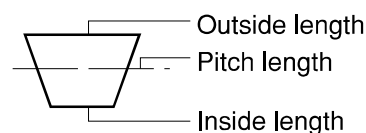

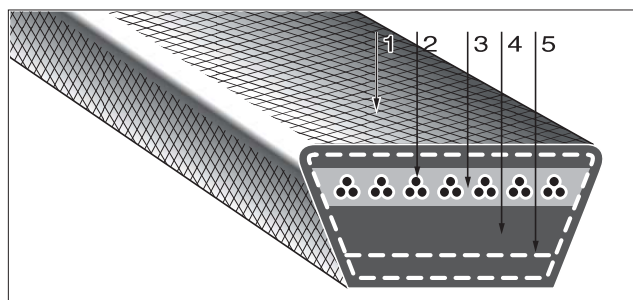

W800

The Series W800 has heat and flex resistance superior to any other V belts, which makes it a top-end V belt for the agricultural machinery use enabling high-load power transmission. You can be assured to use this V belt under harsh environments.

Construction

- 1:Rubber impregnated canvas
- 2:Aramid tensile members
- 3:Chloroprene insularion rubber
- 4:Chloroprene compression rubber
- 5:Bottom canvas

Making full use of the capabilities of agricultural machinery

As the agricultural machinery increasingly enhances its performance and functions, the quality required for V belts used in the agricultural machinery is going upscale.


On fine quality market, there are cases where the agricultural machinery should use more than the RED-S II in order to deliver the thorough functions. Now, we at BANDO launch the Series W800 of the highest quality among V belts (Series W) for the agricultural machinery use on the fine quality market.

Features

	Multiple V belt	RED-S II	W800
Power transmission capability	100	150	300
Service life against reverse bending	100	450	1800
Service life against shock	100	150	450

※ Numerical values shown above represent indexes when taking the standard V belt as 100.

BANDO DOUBLE (HEXAGONAL) V-BELTS

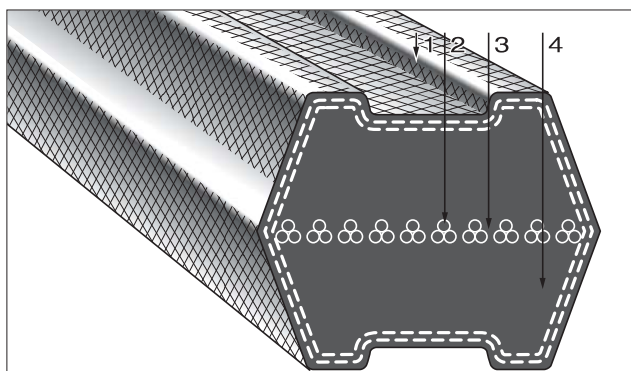


Construction

- 1: Rubber impregnated special woven canvas
- 2: Polyester tensile members
- 3: Chloroprene insulation rubber
- 4: Chloroprene compression rubber

Features + Benefits

- Designed for reverse-bend serpentine drives by covering the belt with special woven fabric.
- New Cross Section for maintaining proper belt position in pulley groove even in the case of extreme reverse-bend drives.
- Due to greater flexibility created by the special woven fabric as well as to the New Cross Section, service life has increased by about 40% over that of traditional double V-Belts.


Dimensions



Size mark

BB 100
 Effective pitch length in inches
 Belt type

Typical reverse-bend
 serpentine drive





Standard Sizes


Type	Size number (Effective pitch length in inches)															
AA	50	53	56	60	63	67	71	75	80	85	90	95	100			
	106	112	118	125	132	140										
BB	60	63	67	71	75	80	85	90	95	100	106	112	118	125	132	140
	140	150	160	170	180	190	200	212	224	236	250					
CC	132	140	150	160	170	180	190	200	212	224	236	250	265	280	300	

※ These sizes are in conformity to JTS.

New cross
 section

Conventional
 cross section



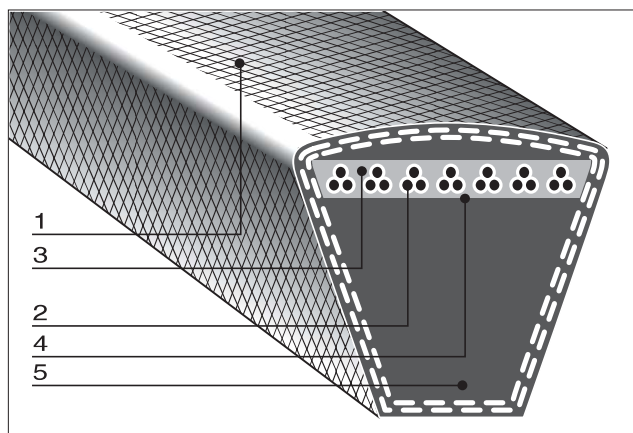


Construction

- 1: Rubber impregnated canvas
- 2: Polyester tensile members
- 3: Chloroprene insulation rubber
- 4: Special lateral reinforcing cord
- 5: Chloroprene compression rubber


Features

- High horsepower rating
Requires about 1/3 of the space needed by traditional Multiple V Belt drive.
- Long life
- High heat and oil resistance
- Length stability. A matched set of Bando Narrow V-Belts for multiple belt drives retains superior uniformity under tension. A Bando matched set remains perfectly matched even after long periods of storage.
- Power Ace raised crookedness nature by making texture of canvas into 120 degrees instead of 90 degrees of conventional V-belt.


Power Ace
Outer Jacket.



Conventional V-belt
Outer Jacket.




Dimensions



Type	Top width a	Thickness b	Angle θ
3V	9.5mm (0.38")	8.0mm (0.32")	40°
5V	16.5mm (0.62")	13.5mm (0.54")	40°
8V	25.5mm (1.0")	23.0mm (0.88")	40°

Size mark

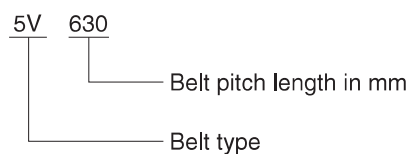


Pulley

Use RMA Engineering Standards recommended pulley groove dimensions,
IP-22 (Specifications for Drives Using Narrow Multiple V-BELTS).

The superior power transmission capacity of the Bando narrow Power Ace® V-belts allows for drive designs with smaller components reducing machine space and cost. The higher efficiency of the Power Ace® V-belts will also result in decreased operating costs.

Just three types of Bando Narrow V Belts ideally cover all five sections of multiple V-belts. For multiple or single drives, the 3V replaces A, B, and C sections; the 5V replaces C and D sections; and the 8V replaces D and E sections.

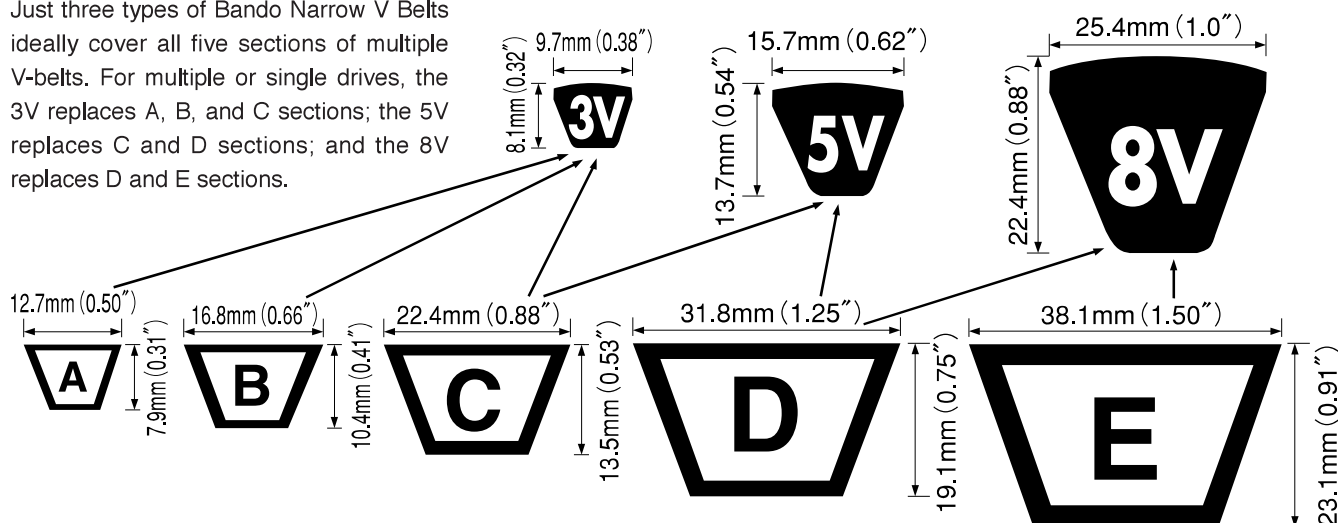


Standard Sizes

※ These sizes are in conformity to RMA.

Belt number	Effective outside length		Belt number	Effective outside length		Belt number	Effective outside length	
	mm	inch		mm	inch		mm	inch
3V 250	635	25.0	3V 475	1207	47.5	3V 900	2286	90.0
3V 265	673	26.5	3V 500	1270	50.0	3V 950	2413	95.0
3V 280	711	28.0	3V 530	1346	53.0	3V1000	2540	100.0
3V 300	762	30.0	3V 560	1422	56.0	3V1060	2692	106.0
3V 315	800	31.5	3V 600	1524	60.0	3V1120	2845	112.0
3V 335	851	33.5	3V 630	1600	63.0	3V1180	2997	118.0
3V 355	902	35.5	3V 670	1702	67.0	3V1250	3175	125.0
3V 375	953	37.5	3V 710	1803	71.0	3V1320	3353	132.0
3V 400	1016	40.0	3V 750	1905	75.0	3V1400	3556	140.0
3V 425	1080	42.5	3V 800	2032	80.0			
3V 450	1143	45.0	3V 850	2159	85.0			
5V 500	1270	50.0	5V1000	2540	100.0	5V2000	5080	200.0
5V 530	1346	53.0	5V1060	2692	106.0	5V2120	5385	212.0
5V 560	1422	56.0	5V1120	2845	112.0	5V2240	5690	224.0
5V 600	1524	60.0	5V1180	2997	118.0	5V2360	5994	236.0
5V 630	1600	63.0	5V1250	3175	125.0	5V2500	6350	250.0
5V 670	1702	67.0	5V1320	3353	132.0	5V2650	6731	265.0
5V 710	1803	71.0	5V1400	3556	140.0	5V2800	7112	280.0
5V 750	1905	75.0	5V1500	3810	150.0	5V3000	7620	300.0
5V 800	2032	80.0	5V1600	4064	160.0	5V3150	8001	315.0
5V 850	2159	85.0	5V1700	4318	170.0	5V3350	8509	335.0
5V 900	2286	90.0	5V1800	4572	180.0	5V3550	9017	355.0
5V 950	2413	95.0	5V1900	4826	190.0			
8V1000	2540	100.0	8V1800	4572	180.0	8V3150	8001	315.0
8V1060	2692	106.0	8V1900	4826	190.0	8V3350	8509	335.0
8V1120	2845	112.0	8V2000	5080	200.0	8V3550	9017	355.0
8V1180	2997	118.0	8V2120	5385	212.0	8V3750	9525	375.0
8V1250	3175	125.0	8V2240	5690	224.0	8V4000	10160	400.0
8V1320	3353	132.0	8V2360	5994	236.0	8V4250	10795	425.0
8V1400	3556	140.0	8V2500	6350	250.0	8V4500	11430	450.0
8V1500	3810	150.0	8V2650	6731	265.0	8V4750	12065	475.0
8V1600	4064	160.0	8V2800	7112	280.0	8V5000	12700	500.0
8V1700	4318	170.0	8V3000	7620	300.0	8V5600	14224	560.0

BANDO NARROW V BELTS

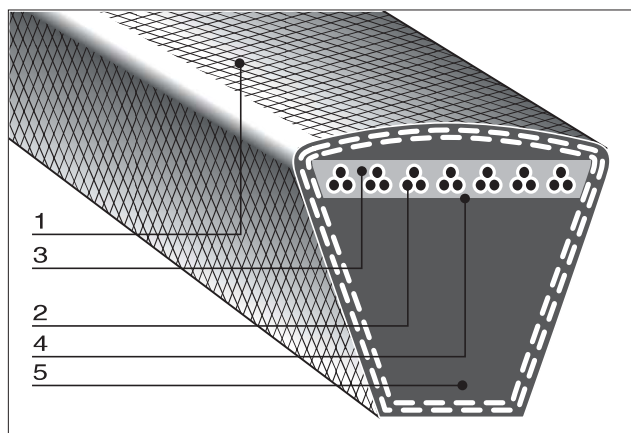

Construction

- 1: Rubber impregnated canvas
- 2: Polyester tensile members
- 3: Chloroprene insulation rubber
- 4: Special lateral reinforcing cord
- 5: Chloroprene compression rubber


Features

- High horsepower rating
Requires about 1/3 of the space needed by traditional Multiple V Belt drive.
- Long life
- High heat and oil resistance
- Length stability. A matched set of Bando Narrow V-Belts for multiple belt drives retains superior uniformity under tension. A Bando matched set remains perfectly matched even after long periods of storage.
- Compated with Conventional V-belt. Power Ace is thick and vealized high load.

Standard Sizes


Belt number	Belt pitch length mm	Belt number	Belt pitch length mm	Belt number	Belt pitch length mm
SPZ	630	SPA	707	SPB	1260
SPZ	670	SPA	732	SPB	1340
SPZ	710	SPA	800	SPB	1410
SPZ	760	SPA	850	SPB	1510
SPZ	800	SPA	900	SPB	1590
SPZ	850	SPA	950	SPB	1690
SPZ	900	SPA	957	SPB	1800
SPZ	950	SPA	982	SPB	1900
SPZ	1010	SPA	1000	SPB□	2020□
SPZ	1080	SPA	1060	SPB□	2150□
SPZ□	1140□	SPA□	1120□	SPB□	2280□
SPZ	1200	SPA	1180	SPB	2410
SPZ	1270	SPA	1250		
SPZ	1340	SPA	1320		
SPZ	1420	SPA	1400		
SPZ	1520	SPA	1500		
SPZ	1600	SPA	1600		
SPZ	1700	SPA	1700		
SPZ	1800	SPA	1800		
SPZ	1900				
SPZ	2030				

Dimensions



Type	Top width a	Thickness b	Angle θ
SPZ	9.5mm	8.0mm	40°
SPA	12.5mm	10.0mm	40°
SPB	16.0mm	13.5mm	40°
SPC	20.0mm	18.0mm	40°


Size mark

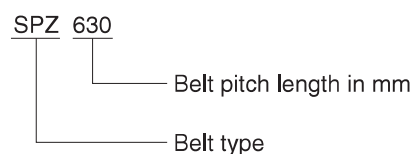

Pulley

Use RMA Engineering Standards recommended pulley groove dimensions, IP-22 (Specifications for Drives Using Narrow Multiple V-BELTS).

BANDO VARIABLE SPEED BELTS

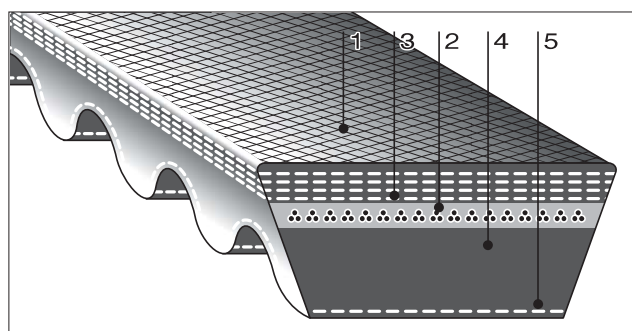

Construction

- 1: Rubber impregnated canvas
- 2: Polyester tensile members
- 3: Chloroprene insulation rubber
- 4: Chloroprene compression rubber
- 5: Rubber impregnated canvas


Features + Benefits

- Flexibility
Cog pattern gives greater flexibility resulting in efficient heat dissipation.
- High power transmission capacity
Strong tensile members and transverse modulus provide high horsepower rating.
- High heat and oil resistance.
- Wide range of speed ratios.

(1) Standard Sizes

Standard belt profiles are shown in Fig.1 and sizes are listed in Fig.2

Dimensions



Size mark

850 VA
Belt type
Nominal number (Pitch length in mm)

Fig.1 Standard Profiles

Type	VA	VB	VC	VD	VE
Thickness (b mm)	8.5	10	11.5	13.5	16
Top width (a mm)	25	31	41	52	66
Pulley Groove Angle (α°)	30~34				


Fig.2 Standard Sizes

Nominal No.	VA	VB	VC	VD	VE	Nominal No.	VA	VB	VC	VD	VE
560	○					1000	○	○	○	○	
600	○					1030				○	○
615	○					1060	○	○		○	
630	○	○				1090			○	○	○
650	○	○				1120	○	○	○	○	○
670	○	○				1150			○	○	○
690	○	○				1180	○	○	○	○	○
710	○	○	○			1220			○	○	○
730	○	○	○			1250		○	○	○	○
750	○	○	○			1280			○	○	○
775	○	○	○			1320			○	○	○
800	○	○	○	○		1360			○	○	○
825	○	○	○	○	○	1400			○	○	○
850	○	○	○	○	○	1450			○	○	○
875	○	○	○	○	○	1500			○	○	○
900		○	○	○	○	1550			○	○	○
925	○	○	○	○	○	1600			○	○	○
950		○	○	○	○	1700				○	○
975	○	○	○	○	○	1800				○	○

(2) Semi-Standard Sizes

Semi-standard profiles are available within the range of top width and pulley groove angles shown in Fig.3. Belt lengths are as per Fig.2

Dimensions




Size mark

850 VA 23 22
Pulley groove angle
Belt top width (mm)
Belt type
Nominal number (Pitch length in mm)

Semi-Standard Profiles

Type	VA	VB	VC	VD	VE
Thickness (b mm)	8.5	10	11.5	13.5	16
Top width (a mm)	16~32	20~38	24~45	30~54	37~67
Pulley Groove Angle α	22~38				

POLYURETHANE COGGED V BELTS (VC), DOUBLE COGGED V BELTS (DC)

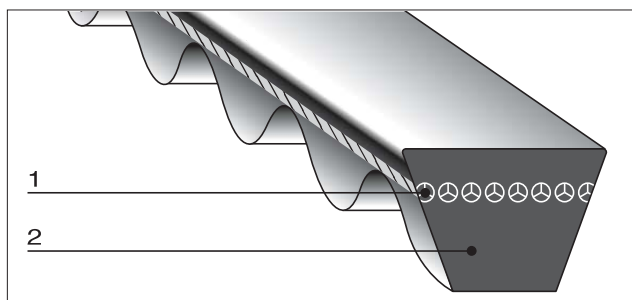


Construction

- 1: Polyester tensile members
- 2: Polyurethane compression section.

Features

- Space saving: Pulleys as small as 0.6" OD can be used.
- Clean operation: No "black rubber dust" problem.
- High oil resistance.


Dimensions



	Type	Top width a		Thickness b		Angle θ
VC	2L	6.5mm	(0.25")	4.0mm	(0.16")	40°
	6	6.0mm	(0.24")	4.0mm	(0.16")	40°
DC	6	6.0mm	(0.24")	4.0mm	(0.16")	40°

Standard Sizes

Type	Belt number	Outside length		Belt number	Outside length		Belt number	Outside length		Belt number	Outside length	
		mm	inch		mm	inch		mm	inch		mm	inch
VC 6	VC6X207	207.0	8.1	VC6X349	349.0	13.7	VC6X450	450.0	17.7	VC6X613	613.0	24.1
	VC6X220	220.0	8.7	VC6X350	350.0	13.8	VC6X460	460.0	18.1	VC6X628	628.0	24.7
	VC6X232	232.0	9.1	VC6X360	360.0	14.2	VC6X466	466.0	18.3	VC6X650	650.0	25.6
	VC6X250	250.0	9.8	VC6X370	370.0	14.6	VC6X470	470.0	18.5	VC6X663	663.0	26.1
	VC6X260	260.0	10.2	VC6X380	380.0	14.96	VC6X480	480.0	18.9	VC6X700	700.0	27.6
	VC6X261	261.0	10.3	VC6X381	381.0	15.0	VC6X485	485.0	19.1	VC6X713	713.0	28.1
	VC6X280	280.0	11.0	VC6X390	390.0	15.4	VC6X490	490.0	19.3	VC6X730	730.0	28.7
	VC6X289	289.0	11.4	VC6X400	400.0	15.7	VC6X500	500.0	19.7	VC6X750	750.0	29.5
	VC6X297	297.0	11.7	VC6X407	407.0	16.0	VC6X511	511.0	20.1	VC6X760	760.0	29.9
	VC6X300	300.0	11.8	VC6X410	410.0	16.1	VC6X520	520.0	20.5	VC6X764	764.0	31.1
	VC6X315	315.0	12.4	VC6X414	414.0	16.3	VC6X530	530.0	20.9	VC6X800	800.0	31.5
	VC6X320	320.0	12.6	VC6X420	420.0	16.5	VC6X540	540.0	21.3	VC6X821	821.0	32.3
	VC6X330	330.0	13.0	VC6X430	430.0	16.9	VC6X550	550.0	21.7	VC6X850	850.0	33.5
	VC6X340	340.0	13.4	VC6X432	432.0	17.0	VC6X561	561.0	22.1	VC6X866	866.0	34.1
	VC6X343	343.0	13.5	VC6X440	440.0	17.3	VC6X587	587.0	23.1			
	VC6X345	345.0	13.6	VC6X444	444.0	17.5	VC6X600	600.0	23.6			
DC 6	DC6X200	200.0	7.9	DC6X277	277.0	10.9	DC6X330	330.0	13.0	DC6X380	380.0	15.0
	DC6X210	210.0	8.3	DC6X280	280.0	11.0	DC6X340	340.0	13.4	DC6X390	390.0	15.4
	DC6X230	230.0	9.1	DC6X290	290.0	11.4	DC6X345	345.0	13.6	DC6X400	400.0	15.7
	DC6X240	240.0	9.4	DC6X300	300.0	11.8	DC6X350	350.0	13.8	DC6X450	450.0	17.7
	DC6X250	250.0	9.8	DC6X310	310.0	12.2	DC6X360	360.0	14.2	DC6X500	500.0	19.7
	DC6X260	260.0	10.2	DC6X315	315.0	12.4	DC6X365	365.0	14.4	DC6X540	540.0	21.3
	DC6X270	270.0	10.6	DC6X320	320.0	12.6	DC6X370	370.0	14.6			

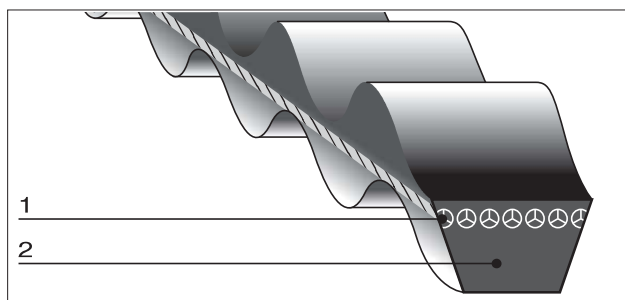

Size mark

(VC 2L types)

2L 080
 Outside length in inches
 Multiplied by 10
 (8 × 10 = 080)
 2L type cogged V belt


(VC-6 type)

VC 6x 350
 Outside length in mm
 6 type
 Cogged V belt

(DC-6 type)

DC 6x 350
 Outside length in mm
 6 type
 Double cogged V belt


BANDO BANFLEX BELTS FOR REPLACEMENT MARKET

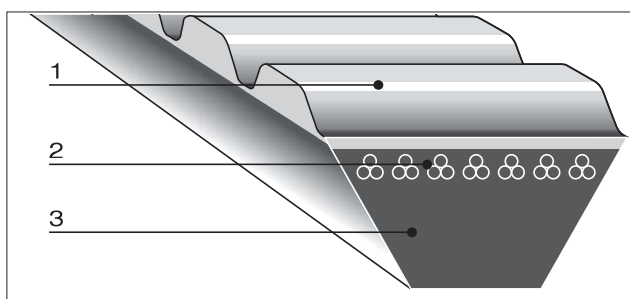

Construction

- 1: Polyurethane
- 2: Polyester tensile members
- 3: Polyurethane compression section.

Size code




Standard Sizes

Effective outside length		Type				Effective outside length		Type				Effective outside length		Type			
mm	inch	3M	5M	7M	11M	mm	inch	3M	5M	7M	11M	mm	inch	3M	5M	7M	11M
180	7.1	○				437	17.2	○	○			1030	40.6		○	○	○
185	7.3	○				450	17.7	○	○			1060	41.7		○	○	○
190	7.5	○				462	18.2	○	○			1090	42.9		○	○	○
195	7.7	○				475	18.7	○	○			1120	44.1		○	○	○
200	7.9	○				487	19.2	○	○			1150	45.3		○	○	○
206	8.1	○				500	19.7	○	○	○		1180	46.5		○	○	○
212	8.3	○				515	20.3	○	○	○		1220	48.0		○	○	○
218	8.6	○				518	20.4		○			1250	49.2		○	○	○
224	8.8	○				530	20.9	○	○	○		1280	50.4		○	○	○
230	9.1	○				545	21.5	○	○	○		1320	52.0		○	○	○
236	9.3	○				560	22.0	○	○	○		1360	53.5		○	○	○
243	9.6	○				580	22.8	○	○	○		1400	55.1		○	○	○
250	9.8	○				600	23.6	○	○	○		1450	57.1		○	○	○
258	10.2	○				615	24.2	○	○	○		1500	59.1		○	○	○
265	10.4	○				630	24.8	○	○	○		1550	61.0			○	○
272	10.7	○				650	25.6	○	○	○		1600	63.0			○	○
280	11.0	○	○			670	26.4	○	○	○		1650	65.0			○	○
290	11.4	○	○			690	27.2	○	○	○		1700	66.9			○	○
300	11.8	○	○			710	28.0	○	○	○	○	1750	68.9			○	○
307	12.1	○	○			730	28.7	○	○	○	○	1800	70.9			○	○
315	12.4	○	○			750	29.5	○	○	○	○	1850	72.8		○	○	○
325	12.8	○	○			775	30.5		○	○	○	1900	74.8			○	○
335	13.2	○	○			800	31.5		○	○	○	1950	76.8			○	○
345	13.6	○	○			825	32.5		○	○	○	2000	78.7			○	○
355	14.0	○	○			850	33.5		○	○	○	2060	81.1			○	○
365	14.4	○	○			875	34.4		○	○	○	2120	83.5			○	○
375	14.8	○	○			900	35.4		○	○	○	2180	85.8			○	○
387	15.2	○	○			925	36.4		○	○	○	2240	88.2			○	○
400	15.7	○	○			950	37.4		○	○	○	2300	90.6			○	○
412	16.2	○	○			975	38.4		○	○	○						
425	16.7	○	○			1000	39.4		○	○	○						


Features + Benefits

- Space saving
High horsepower rating and small pulley requirements permit compact designs.
- Smooth running
Belt runs very smoothly because of ground side wall.
- High speed drive
Because they are very light weight, Banflex belts can be driven at high speeds without excessive vibration or wear.

Dimensions



Type	Top width a		Thickness b	
3M	3.0mm	(0.12")	2.0mm	(0.08")
5M	5.0mm	(0.20")	3.0mm	(0.12")
7M	7.0mm	(0.28")	5.3mm	(0.20")
11M	11.0mm	(0.43")	6.9mm	(0.28")

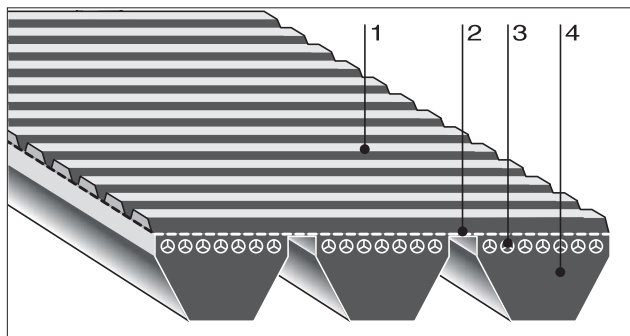

Construction

- 1: Polyurethane
- 2: Tie band
- 3: Polyester tensile members
- 4: Polyurethane compression section


Features + Benefits

- Smooth high speed drive up to 12,000 feet/min.
- Low vibration without spin or jump off.
- Space saving
Small pulleys and high speed ratios make it possible to design compact and lightweight machines.
- Ideal for horizontal drive.
- High oil and ozone resistance.

Standard Sizes


Outside length		Type			Outside length		Type			Outside length		Type		
mm	inch	5MS	7MS	11MS	mm	inch	5MS	7MS	11MS	mm	inch	5MS	7MS	11MS
280	11.0	○			580	22.8	○	○		1180	46.5	○	○	○
290	11.4	○			600	23.6	○	○		1220	48.0	○	○	○
300	11.8	○			615	24.2	○	○		1250	49.2	○	○	○
307	12.1	○			630	24.8	○	○		1280	50.4	○	○	○
315	12.4	○			650	25.6	○	○		1320	52.0	○	○	○
325	12.8	○			670	26.4	○	○		1360	53.5	○	○	○
335	13.2	○			690	27.2	○	○		1400	55.1	○	○	○
345	13.6	○			710	28.0	○	○	○	1450	57.1	○	○	○
355	14.0	○			730	28.7	○	○	○	1500	59.1	○	○	○
365	14.4	○			750	29.5	○	○	○	1550	61.0		○	○
375	14.8	○			775	30.5	○	○	○	1600	63.0		○	○
387	15.2	○			800	31.5	○	○	○	1650	65.0		○	○
400	15.7	○			825	32.5	○	○	○	1700	66.9		○	○
412	16.2	○			850	33.5	○	○	○	1750	68.9		○	○
425	16.7	○			875	34.4	○	○	○	1800	70.9		○	○
437	17.2	○			900	35.4	○	○	○	1850	72.8	○	○	○
450	17.7	○			925	36.4	○	○	○	1900	74.8		○	○
462	18.2	○			950	37.4	○	○	○	1950	76.8		○	○
475	18.7	○			975	38.4	○	○	○	2000	78.7		○	○
487	19.2	○			1000	39.4	○	○	○	2060	81.1		○	○
500	19.7	○	○		1030	40.6	○	○	○	2120	83.5		○	○
515	20.3	○	○		1060	41.7	○	○	○	2180	85.8		○	○
530	20.9	○			1090	42.9	○	○	○	2240	88.2		○	○
545	21.5	○	○		1120	44.1	○	○	○	2300	90.6		○	○
560	22.0	○	○		1150	45.3	○	○	○					

Dimensions



Type		Top width a		Thickness b		Pitch P
		mm	inch	mm	inch	
5MS	2 ribs	9.8	0.39	3.3	0.13	5.3mm (0.21")
	3 ribs	15.1	0.59			
7MS	2 ribs	15.6	0.61	5.3	0.21	8.5mm (0.33")
	3 ribs	24.1	0.95			
11MS	2 ribs	24.4	0.96	7.0	0.28	13.2mm (0.52")
	3 ribs	37.6	1.48			


Size mark

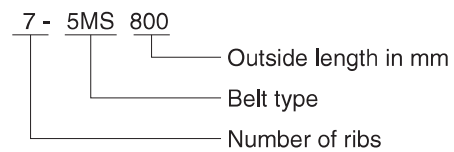

BANFLEX SCRUM PULLEY

Banflex scrim apply to these pulley of the size as following.
In our company, Since we product these pulley, We are entirely at your service.


Dimensions



Standard Sizes

pulley size									
Type	W ±0.05 (mm)	e +0.13 -0.05 (mm)	f min (mm)	angle		h r max (mm)	H (mm)	r max (mm)	k (mm)
				external diameter do (mm)	$\alpha \pm$ 1/4 (angle)				
5MS	4.50	5.30	3.5	25~28	60	3.50	3.90	0.4	0.5
				≤38	61	3.43	3.82		
				≤62	62	3.37	3.74		
				62~	63	3.31	3.67		
7MS	7.10	8.50	5.7	38~44	59	5.66	6.27	0.6	0.7
				≤62	60	5.55	6.15		
				≤100	61	5.44	6.03		
				100~	62	5.34	5.91		
11MS	11.20	13.20	8.6	60~80	60	8.90	9.70	0.8	0.5
				≤120	61	8.73	9.51		
				≤238	62	8.57	9.32		
				238~	63	8.41	9.14		

POLYURETHANE OPEN-END V BELT (CORDLESS) [BANCORD V BELT]

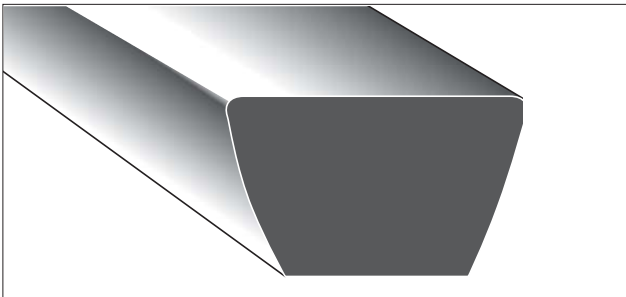

Construction

Polyurethane without tensile members


Features

Simply cut the belt to the required length and heat-splice the ends.

Standard Make Up


100m(328 feet) per roll.

Dimensions




Type	Top width a	Thickness b	Angle θ
SA	12.7mm (0.5")	7.0mm (0.27")	40°
SB	16.7mm (0.67")	9.0mm (0.35")	40°
SC	22.2mm (0.87")	11.0mm (0.43")	40°

BANDO BANDED V BELTS (POWER SCRUM)

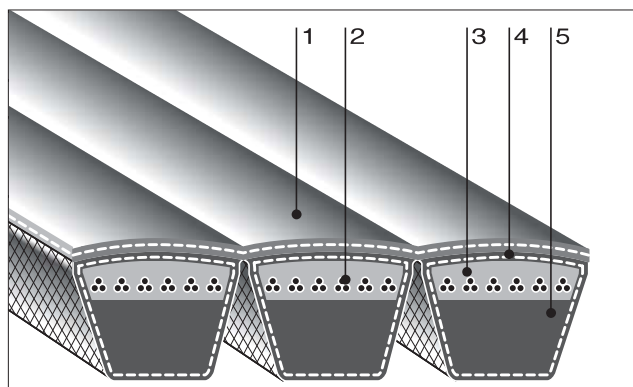

Multiple type

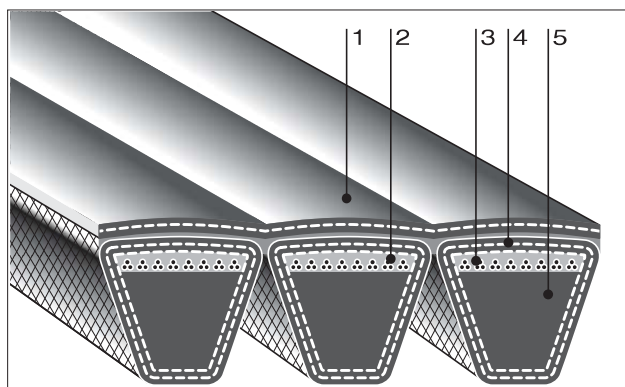

Narrow V-type

Construction


- 1:Tie-band
- 2:Polyester tensile members
- 3:Chloroprene insulation rubber
- 4:Rubber impregnated canvas
- 5:Chloroprene compression rubber.

Features + Benefits


- Permanent matched set.
- No lateral whip, spin or turn over.
- Deep pulley grooves are not required even on horizontal drives.
- Heat and oil resistant.

Size mark


(Multiple V type)

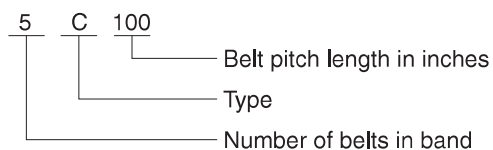

(Narrow type)

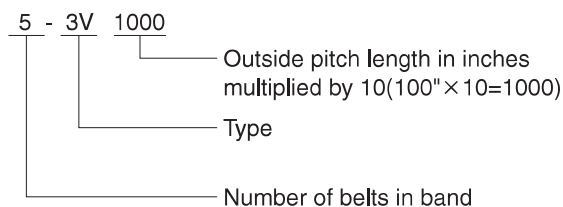

Dimensions

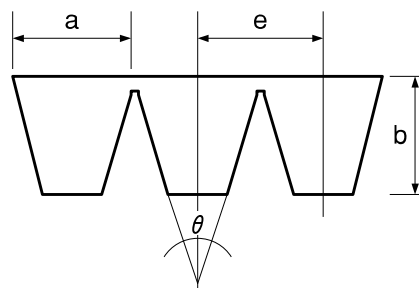

Type	Top width of one belt a	Thickness b	Angle θ	Pitch between two belts e
A	13.0mm (0.5")	10.0mm (0.39")	40°	15.0mm (0.59")
B	17.0mm (0.66")	13.0mm (0.51")	40°	19.0mm (0.75")
C	22.2mm (0.88")	16.0mm (0.63")	40°	25.5mm (1.00")
D	32.0mm (1.25")	21.5mm (0.85")	40°	37.0mm (1.46")
3V	9.5mm (0.38")	10.0mm (0.39")	40°	10.3mm (0.41")
5V	15.9mm (0.62")	15.5mm (0.61")	40°	17.5mm (0.69")
8V	25.4mm (1.0")	25.0mm (0.98")	40°	28.6mm (1.13")

BANDO BANDED V BELTS (POWER SCRUM)

Standard Sizes

Narrow V type


※These sizes are in conformity to JIS.

Type	Belt number	Outside length		Belt number	Outside length		Belt number	Outside length	
		mm	inch		mm	inch		mm	inch
3V	3V 400	1,016	40.0	3V 630	1,600	63.0	3V1000	2,540	100.0
	3V 425	1,080	42.5	3V 670	1,702	67.0	3V1060	2,692	106.0
	3V 450	1,143	45.0	3V 710	1,803	71.0	3V1120	2,845	112.0
	3V 475	1,207	47.5	3V 750	1,905	75.0	3V1180	2,997	118.0
	3V 500	1,270	50.0	3V 800	2,032	80.0	3V1250	3,175	125.0
	3V 530	1,346	53.0	3V 850	2,159	85.0	3V1320	3,353	132.0
	3V 560	1,422	56.0	3V 900	2,286	90.0	3V1400	3,556	140.0
	3V 600	1,525	60.0	3V 950	2,413	95.0			
5V	5V 600	1,524	60.0	5V1120	2,845	112.0	5V2120	5,385	212.0
	5V 630	1,600	63.0	5V1180	2,997	118.0	5V2240	5,690	224.0
	5V 670	1,702	67.0	5V1250	3,175	125.0	5V2360	5,994	236.0
	5V 710	1,803	71.0	5V1320	3,353	132.0	5V2500	6,350	250.0
	5V 750	1,905	75.0	5V1400	3,556	140.0	5V2650	6,731	265.0
	5V 800	2,032	80.0	5V1500	3,810	150.0	5V2800	7,112	280.0
	5V 850	2,159	85.0	5V1600	4,064	160.0	5V3000	7,620	300.0
	5V 900	2,286	90.0	5V1700	4,318	170.0	5V3150	8,001	315.0
	5V 950	2,413	95.0	5V1800	4,572	180.0	5V3350	8,509	335.0
	5V1000	2,540	100.0	5V1900	4,826	190.0	5V3550	9,017	355.0
	5V1060	2,692	106.0	5V2000	5,080	200.0			
8V	8V1000	2,540	100.0	8V1800	4,572	180.0	8V3150	8,001	315.0
	8V1060	2,692	106.0	8V1900	4,826	190.0	8V3350	8,509	335.0
	8V1120	2,845	112.0	8V2000	5,080	200.0	8V3550	9,017	355.0
	8V1180	2,997	118.0	8V2120	5,385	212.0	8V3750	9,525	375.0
	8V1250	3,175	125.0	8V2240	5,690	224.0	8V4000	10,160	400.0
	8V1320	3,353	132.0	8V2360	5,994	236.0	8V4250	10,795	425.0
	8V1400	3,556	140.0	8V2500	6,350	250.0	8V4500	11,430	450.0
	8V1500	3,810	150.0	8V2650	6,731	265.0	8V4750	12,065	475.0
	8V1600	4,064	160.0	8V2800	7,112	280.0	8V5000	12,700	500.0
	8V1700	4,318	170.0	8V3000	7,620	300.0	8V5600	14,224	560.0

Multiple V type

Type	Minimum effective pitch length		Maximum effective pitch length	
	mm	inch	mm	inch
A	1,524	60	5,080	200
B	1,524	60	8,890	350
C	2,540	100	8,890	350
D	2,540	100	8,890	350


Recommended Pulley Groove Pitch



Type	Pulley pitch P	
	mm	inch
A	15.0	0.59
B	19.0	0.75
C	25.5	1.00
D	37.0	1.46

Type	Pulley pitch P	
	mm	inch
3V	10.3	0.41
5V	17.5	0.69
8V	28.6	1.13

BANDO V-RIBBED BELTS (RUBBER)

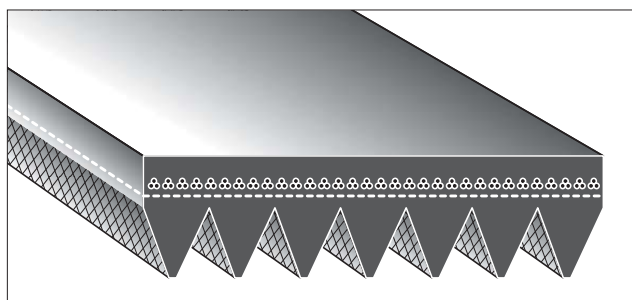

Construction

- 1: Chloroprene backside rubber
- 2: Polyester tensile members
- 3: Chloroprene compression rubber
- 4: Rubber impregnated canvas (no canvas Type J)


Features + Benefits

- High horsepower rating.
V ribbed belts have a 30-50% higher HP rating than multiple V belts.
- Space saving
Pulleys with outside diameters as small as 0.8" can be used. (Type J)
- Lower vibration than flat belts.
Comparable to flat belts.
- Oil and heat resistant.

Standard Sizes


Type	belt number	Effective length		belt number	Effective length		belt number	Effective length	
		mm	inch		mm	inch		mm	inch
J	108J	274.3	10.8	245J	622.3	24.5	360J	114.4	36.0
	117J	297.2	11.7	251J	637.5	25.1	370J	939.8	37.0
	132J	335.3	13.2	260J	660.4	26.0	380J	965.2	38.0
	140J	355.6	14.0	278J	706.1	27.8	390J	990.0	39.0
	159J	403.9	15.9	280J	711.2	28.0	400J	1016.0	40.0
	180J	457.2	18.0	300J	762.0	30.0	430J	1092.2	43.0
	190J	482.6	19.0	307J	779.8	30.7	450J	1143.0	45.0
	199J	505.5	19.9	315J	800.1	31.5	460J	1168.4	46.0
	210J	533.4	21.0	323J	820.4	32.3	470J	1193.8	47.0
	220J	558.8	22.0	330J	838.2	33.0	474J	1204.0	47.4
	224J	569.0	22.4	337J	856.0	33.7	490J	1244.6	49.0
	235J	596.9	23.5	340J	863.6	34.0	520J	1320.8	52.0
	240J	609.0	24.0	350J	889.0	35.0	530J	1346.2	53.0
L	214L	543.6	21.4	410L	1041.4	41.0	730L	1854.2	73.0
	241L	612.1	24.1	415L	1054.1	41.5	750L	1905.0	75.0
	260L	660.4	26.0	417L	1059.2	41.7	780L	1981.2	78.0
	277L	703.6	27.7	423L	1074.4	42.3	815L	2070.1	81.5
	290L	736.6	29.0	470L	1193.8	47.0	835L	2120.9	83.5
	327L	830.6	32.7	490L	1244.6	49.0	865L	2197.1	86.5
	337L	856.0	33.7	515L	1308.1	51.5	932L	2367.3	93.2
	344L	873.8	34.4	530L	1346.2	53.0	975L	2476.5	97.5
	347L	881.4	34.7	540L	1371.6	54.0	1016L	2580.6	101.6
	348L	883.9	34.8	570L	1447.8	57.0	1063L	2700.0	106.3
	358L	909.3	35.8	600L	1524.0	60.0	1120L	2844.8	112.0
	362L	919.5	36.2	615L	1562.1	61.5	1200L	3048.0	120.0
	376L	955.0	37.6	650L	1651.0	65.0	1480L	3759.2	148.0
	386L	980.4	38.6	680L	1727.2	68.0			
	395L	1003.3	39.5	690L	1752.6	69.0			
M	417M	1059.2	41.7	851M	2161.5	85.1	1310M	3327.4	131.0
	557M	1414.8	55.7	878M	2230.1	87.8	1470M	3733.8	147.0
	630M	1600.2	63.0	990M	2514.6	99.0	1900M	4826.0	190.0
	652M	1656.1	65.2	1150M	2921.0	115.0			
	756M	1920.2	75.6	1230M	3124.2	123.0			

Dimensions




Type	Thickness (b)		Angle θ	Pitch (p)	
	mm	inch		mm	inch
J	4.0	0.16	40°	2.34	0.092
L	9.0	0.34	40°	4.70	0.185
M	16.5	0.65	40°	9.40	0.370

Size code

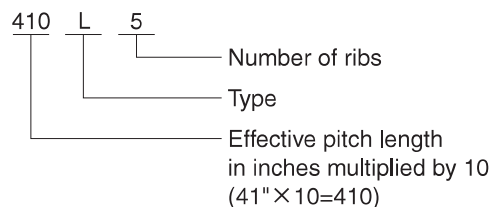

BANDO V-RIBBED BELTS (POLYURETHANE)

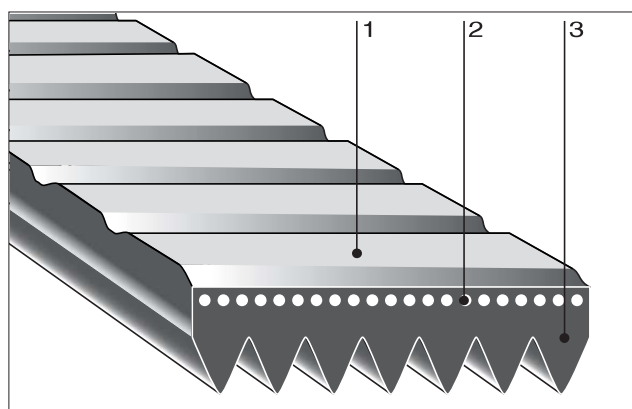

Construction

- 1: Polyurethane
- 2: Polyamid tensile members
- 3: Polyurethane

Features + Benefits


- Suitable to fixed center distance applications.
Belt's elasticity allows easy installation on fixed center distance pulleys without tools.
- Withstands high shock load.
Polyamid tensile members protect belts from shock load damage, making them well-suited for small machines and other high speed/high shock load applications.
- High speed.
- Space saving
Small pulley requirement permits smaller, more compact designs.

Standard Sizes

Type	Belt number	Pitch length		Belt number	Pitch length		Belt number	Pitch length	
		mm	inch		mm	inch		mm	inch
H (Polyurethane)	80H	203.2	8.0	132H	335.3	13.2	200H	508.0	20.0
	85H	215.9	8.5	136H	345.4	13.6	214H	543.2	21.4
	90H	228.8	9.0	140H	355.6	14.0	215H	547.0	21.5
	95H	241.3	9.5	147H	373.4	14.7	221H	562.0	22.1
	100H	254.0	10.0	150H	381.0	15.0	230H	584.2	23.0
	106H	269.2	10.6	160H	406.4	16.0	235H	596.9	23.5
	112H	285.4	11.2	170H	431.8	17.0	304H	772.2	30.4
	118H	299.7	11.8	180H	457.2	18.0			
	125H	317.5	12.5	190H	482.6	19.0			
J (Polyurethane)	81J	205.3	8.1	135J	343.8	13.5	236J	599.4	23.6
	82J	209.1	8.2	139J	351.5	13.8	250J	630.8	24.8
	85J	215.9	8.5	142J	363.3	14.3	260J	660.4	26.0
	90J	228.6	9.0	145J	368.3	14.5	264J	670.0	26.4
	95J	241.3	9.5	153J	389.3	15.3	280J	711.2	28.0
	97J	247.3	9.7	160J	406.4	16.0	300J	762.0	30.0
	99J	251.3	9.9	171J	431.3	17.0	312J	792.5	31.2
	108J	273.8	10.8	175J	442.3	17.4	318J	807.7	31.8
	116J	293.5	11.6	180J	457.2	18.0	323J	819.3	32.3
	117J	297.0	11.7	189J	480.2	18.9			
	122J	310.9	12.2	194J	492.8	19.4			
	125J	317.5	12.5	201J	510.5	20.1			
	130J	330.0	13.0	234J	594.0	23.4			


Same size in not equal for pitch length(mm) and converted belt number(mm)

Dimensions

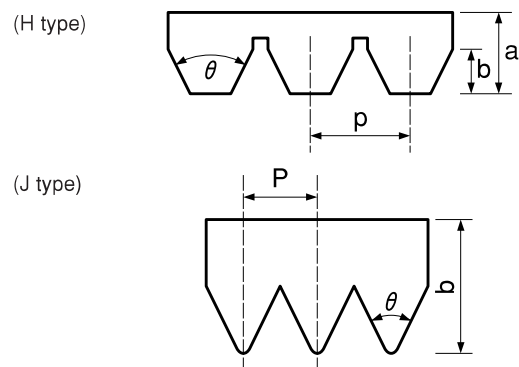


Type	Pitch P	Total thickness a	Rib thickness b	Angle theta
H	1.6mm (0.063")	2.5mm (0.098")	1.0mm (0.039")	40°
J	2.4mm (0.094")	4.0mm (0.157")	2.3mm (0.091")	40°

Size mark

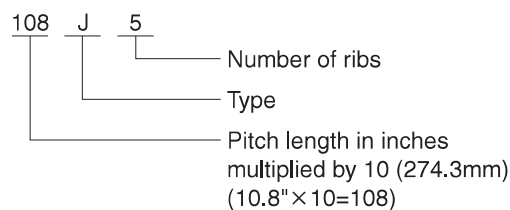

BANDO POLYURETHANE ROUND BELTS (ENDLESS)

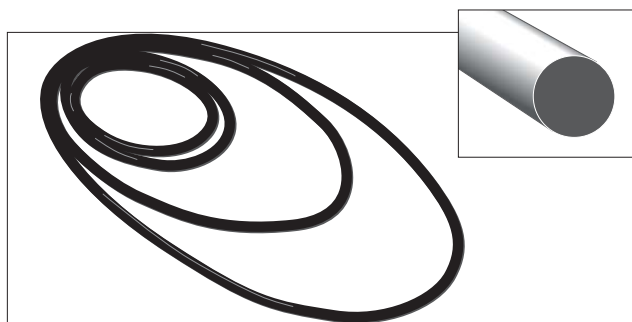


Construction

Polyurethane without tensile members

Features + Benefits

- Low starting torque
Excellent flexibility, provides smooth slip-free starts even in low temperatures.
- Easy installation
Easy to install by hand.
No retensioning needed.
- Minimal tension decay.
- High oil and ozone resistance


Size mark

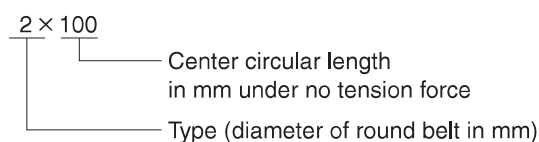

Standard Sizes

Type 2 2mm diameter		Type 3 3mm diameter		Type 4 4mm diameter		Type 5 5mm diameter	
Center circular length		Center circular length		Center circular length		Center circular length	
mm	inch	mm	inch	mm	inch	mm	inch
100.0	3.94	115.0	4.53	225.0	8.86	225.0	8.86
107.0	4.21	120.0	4.72	230.0	9.06	230.0	9.06
112.0	4.41	132.0	5.20	235.0	9.25	247.0	9.72
120.0	4.72	138.0	5.43	250.0	9.84	248.0	9.76
125.0	4.92	140.0	5.51	254.0	10.00	250.0	9.84
130.0	5.12	150.0	5.91	258.0	10.16	275.0	10.83
134.0	5.28	153.0	6.02	264.0	10.39	290.0	11.42
136.0	5.35	155.0	6.10	275.0	10.83	300.0	11.81
140.0	5.51	160.0	6.30	284.0	11.18	305.0	12.01
145.0	5.71	165.0	6.50	285.0	11.22	310.0	12.20
147.0	5.79	170.0	6.69	290.0	11.42	330.0	12.99
152.0	5.98	172.0	6.77	300.0	11.81	345.0	13.58
160.0	6.30	180.0	7.09	305.0	12.01	348.0	13.70
170.0	6.69	182.0	7.17	316.0	12.44	363.0	14.29
180.0	7.09	190.0	7.48	323.0	12.72	375.0	14.76
183.0	7.20	200.0	7.87	332.0	13.07	380.0	14.96
190.0	7.48	204.0	8.03	335.0	13.19	402.0	15.83
200.0	7.87	213.0	8.39	346.0	13.62	422.0	16.61
213.0	8.39	223.0	8.78	361.0	14.21	440.0	17.32
227.0	8.94	230.0	9.06	367.0	14.45	460.0	18.11
239.0	9.41	236.0	9.29	374.0	14.72		
244.0	9.61	240.0	9.45	377.0	14.84		
250.0	9.84	250.0	9.84	385.0	15.16		
273.0	10.7	260.0	10.24	390.0	15.35		
290.0	11.4	275.0	10.83	415.0	16.34		
		282.0	11.10				
		285.0	11.22				
		290.0	11.42				
		305.0	12.01				
		308.0	12.13				
		330.0	12.99				
		347.0	13.66				
		356.0	14.02				
		363.0	14.29				
		376.0	14.80				
		390.0	15.35				
		400.0	15.75				
		430.0	16.93				
		441.0	17.36				
		450.0	17.72				

BANDO BANCORD (POLYURETHANE OPEN-END ROUND BELT)

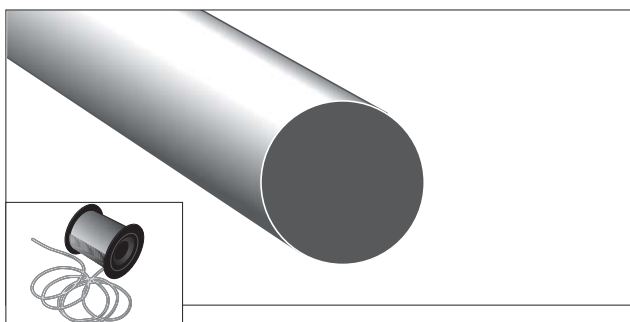

Construction

Polyurethane without tensile members


Features + Benefits

Adjusts to any application, including three dimensional drives, by simply cutting the belt to the required length and heatsplicing the ends.


Standard Sizes

Diameter of belt	mm	1.5	2	2.5	3	3.5	4	5	6	7	8	9	10	11	12	15
	inch	0.06	0.08	0.10	0.12	0.14	0.16	0.20	0.24	0.28	0.31	0.35	0.39	0.43	0.47	0.60
#480 Standard		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
#489 high modulus			○				○		○		○		○		○	
length/roll		#480 200m/roll #489 100m/roll						100m/roll								


FLAT BELTS (POLYURETHANE, CORDLESS)

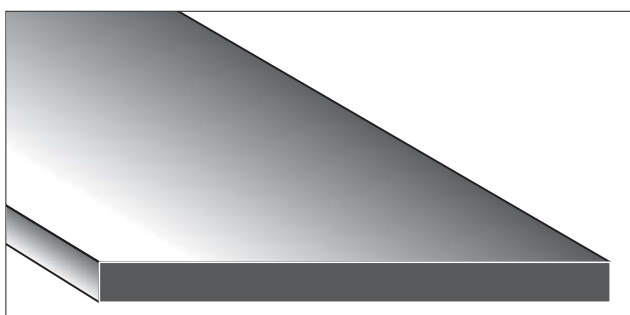

Dimensions



Size mark

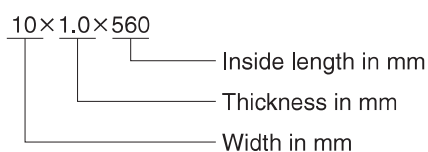

Construction

Polyurethane without tensile members

Features + Benefits

- Smooth constant speed
Thickness tolerance is $\pm 0.0020''$ (0.05mm), so there is virtually no speed variation.
- Space saving
Minimum pulley diameter is 0.2" (5.0mm). This allows high speed ratios.

Standard Sizes

a × b (mm)	BELT INSIDE LENGTH (mm)
10×1.0	169 172 180 186 197 220 232 235 240 243 262 264 265 269 279
	280 283 287 289 317 319 323 371 386 388 410 415 417 422 429
	482 493 505 506 515 578 579 585 591 594 617 641 669 685 692
	700 728 750 772 787 845 889 990

The above belt should be installed at 6% stretch.

PS Belts

BANDO PS Belt is made of seamless woven fabric. The fabric is coated with various kinds of rubber or polyurethane rubber. This belt is newly developed to meet precision drives such as office automation equipment, computer peripherals and banking machines.

Type *-1	Applicable performance	Construction				Color tone	Available dimensions *-3		
		Number of tensile member(ply)	Material of	Shape of surface *-2			Total thickness	Width	Inside perimeter length
A-1C	Low-torque, high-speed power transmission Weather resistance, cold resistance	1-ply polyester	Chloroprene rubber	Rough surface	Smooth surface	Black	0.22	3~300	100~1900
A-1U	Low-torque, high-speed power transmission Weather resistance, oil resistance, abrasion resistance	1-ply polyester	Polyurethane	Rough surface	Smooth surface	White, green	0.22	3~300	100~1900
A-4U	Low-torque, high-speed power transmission Weather resistance, oil resistance, abrasion resistance	1-ply polyester	Polyurethane	Rough surface	Smooth surface	White, green	0.4	5~300	180~5700
A-10N	Medium-torque, high-speed power transmission Oil resistance, cold resistance	1-ply polyester	Nitrile rubber	Rough surface	Smooth surface	Black	1.0	5~300	300~5700
A-13C	Medium-torque, high-speed power transmission Weather resistance, cold resistance	1-ply polyester	Chloroprene rubber	Rough surface	Smooth surface	Black	1.1	5~300	300~5700
A-P	Medium-torque, high-speed power transmission (No unraveling from edges)	4-ply polyamide	Impregnated chloroprene rubber	Canvas surface	Canvas surface	Black	1.3	*-4 10~350	200~1000 1000~2700
A-W	Medium-torque, high-speed power transmission Quiet operation (No unraveling from edges)	1-ply vinylon	Canvas fabric	Canvas surface	Canvas surface	Canvas natural color	2.0	20~200	800~5700
B-2C	Conveyance of light objects such as sheets of paper, tickets, etc. Weather resistance, cold resistance	1-ply polyester	Chloroprene rubber	Rough surface	Smooth surface	Black	0.8	5~300	250~5700
B-2H	Conveyance of light objects such as sheets of paper, tickets, etc. Weather resistance, anti-staining properties	1-ply polyester	Hypalon rubber	Rough surface	Smooth surface	White	0.8	5~300	250~5700
B-2CE	Conveyance of light objects such as sheets of paper, tickets, etc. Superconductivity (a level of 100Ω)	1-ply polyester	Chloroprene rubber	Canvas surface	Smooth surface	Black	1.1	10~200	250~5700
B-3C	Conveyance of light objects such as sheets of paper, tickets, etc. Low-torque, high-speed power transmission Weather resistance, cold resistance	1-ply polyester	Chloroprene rubber	Rough surface	Smooth surface	Black	0.6	10~300	250~5700
B-6N	Conveyance of light objects such as sheets of paper, tickets, etc. Low-torque, high-speed power transmission Oil resistance, abrasion resistance	1-ply polyester	Nitrile rubber	Rough surface	Smooth surface	Black	1.0	10~300	250~5700
C-8C	Precision power transmission and conveyance of light objects on equipment fixed between axes	1-ply polyester	Chloroprene rubber	Rough surface	Smooth surface	Black	0.7	3~300	160~5700
C-16C	Precision power transmission and conveyance of light objects on equipment fixed between axes	1-ply polyester	Chloroprene rubber	Rough surface	Smooth surface	Black	0.7	3~300	160~5700
Z-H250X	Low-torque power transmission, conveyance of light objects at high ambient temperatures (i.e., 250Åé or less)	1-ply aromatic amide	Silicon rubber	Mirror surface	Mirror surface	Liver	0.9	10~300	460~2000
E-8U	Conveyance of light objects such as banknotes, cards, tickets, etc. on equipment fixed between axes	1-ply polyester	Polyurethane (Millable)	Polished surface	Polished surface	Black	0.65 0.8 1.0	8~200	50~1500
EX-10U	Conveyance of light objects such as banknotes, cards, tickets, etc. on equipment fixed between axes	1-ply polyester	Polyurethane (Millable)	Mirror surface (Mold surface)	Polished surface	Black	0.65	8~200	180~1100

*1 Besides types listed above, available types A-1N, A-4C, A-10C, A-13N, B-2N, B-2UF, B-3N, B-6C, C-8N, C-8U, C-16N, C-16U, and others.

*2 Select proper working surface according to your use conditions. Normally, it is recommended to use the smooth surface as the pulley surface.

Besides the surfaces listed above, rough/polished surface and mirror/mirror (polished on one side) are available. For further information, contact us or your representative.

*3 Any belt dimensions other than standard ones are available on your request. For any dimensions other than available dimensions listed above, contact us or your representative.

*4 10 mm to (0.15 × Belt's inside perimeter length) mm

Features

- 1. Compact design** Drives are compact because of thin, seamless and flexible belt.
- 2. Smooth running** Seamless belt can give smooth running with no vibration.
- 3. Maintenance free** Belt does not stretch because of specially treated tension member.
- 4. Energy saver** Lightweight and flexible belt minimizes power loss.

◎:Optimum ○:Suited ×:N/A

Type *-1	Tensile strength N/10 mm width	Axial load at stabilized extension N/10 mm wide	Min. pulley diameter	Weight (approx.) g/10 mm wideX m long	Abrasion resistance	Oil resistance	Electrical conductivity	Flame retardance	Ozone resistance	Major application
A-1C	150	0.5% 30	5	2.5	○	○	◎	◎	◎	• Take-up of tape • Dial driving
A-1U	150	0.5% 30	5	2.3	◎	◎	×	○	◎	• Precision gauge driving • Acoustic equipment
A-4U	400	0.5% 45	10	4	◎	◎	×	○	◎	• Terminal equipment • Communication equipment • Card reader • Magnetic disk • Acoustic equipment
A-10N	1000	0.5% 110	15	11	◎	◎	◎	○	×	• Grinding machine • Textile machinery • Routing machine • Washing machine • Line printer • Automatic lathe
A-13C	1350	0.5% 170	20	12	○	○	◎	◎	◎	• Vacuum cleaner • Grinding machine • Rotary burner • Textile machinery
A-P	1400	1% 130 2% 210 3% 280	50	11	○	○	◎	○	◎	• Printing machine • Automatic control device
A-W	1700	1% 200 2% 490	30	9	×	◎	×	×	◎	• Thread plying machine • Cigarette making machine
B-2C	250	1% 30 2% 50 3% 60	10	9	○	○	◎	◎	◎	• Ticket-issuing machine • Bank terminal machine • Automatic ticket gate • Automatic packaging machine • Money change machine • Cash dispenser
B-2H	250	1% 30 2% 50 3% 60	10	9	○	○	×	◎	◎	• Banknote checker • Office equipment • Automatic checker • Fare box • Ticket vending machine • Printing machine
B-2CE	200	1% 60 2% 80 3% 110	30	12	○	○	◎	◎	◎	• Sorter • Copying machine • Paper conveyance system • Cash dispenser
B-3C	380	1% 70 2% 120 3% 140	10	7	○	○	◎	◎	◎	• Copying machine • Motoring amusement machine • Automatic packaging machine • Microfilm equipment
B-6N	600	1% 180 2% 280 3% 360	25	11	◎	◎	◎	○	×	• Automatic checker • Printing machine • Office equipment • Optical reader
C-8C	80	1% 9 2% 15 3% 20	5	8	○	○	◎	◎	◎	• Floppy disk • Office equipment
C-16C	160	1% 20 2% 30 3% 40	7	8	○	○	◎	◎	◎	• Document feeder • Copying machine • Sorter • Fish detector
Z-H250X	400	1% 120	30	11	×	○	×	○	◎	• Copying machine • Heat sealing machine • Measuring meter • Testing machine • Large-sized facsimile
E-8U	—	5% 10 6% 12 7% 14 8% 16	8	10/total thickness 1.0mm	◎	○	◎	○	◎	• Bank terminal equipment • Cash dispenser • Card reader • Office equipment
EX-10U	—	5% 9 6% 11 7% 13 8% 15	8	10	◎	○	◎	○	◎	• Bank terminal equipment • Cash dispenser • Card reader • Office equipment

Nomenclature of belt ※-1 Besides types listed above, available types A-1N, A-4C, A-10C, A-13N, B-2N, B-2UF, B-3N, B-6C, C-8N, C-8U, C-16N, C-16U and others.

B - 2 C E
① ②③④

① Series name of belt ... A: Mainly used for high-speed power transmission, B: Mainly used for conveyance of light objects such as sheets of paper, tickets, etc., C: Mainly used for precision power transmission, Z: Mainly used for conveyance at high temperatures, E: Used for conveyance of light objects

② Tensile strength of belt ... Series A & B: Indicating 1/100 of tensile strength, Series C & E: Indicating 1/10 of tensile strength

③ Material of cover ... C: Chloroprene, N: Nitrile rubber, U: Polyurethane, H: Hypalon rubber

④ Additional function ... E: Electrical conductivity of a level of 100Ω, F: Certified by Food Sanitation Law and Official Notice No.20 of Ministry of Health, Labour and Welfare.

※P,W: Special textile fabric

BANDO POLYURETHANE SYNCHRONOUS BELT TN


Polyurethane Synchronous belt TN is a highly precise, extra light-duty belt with a unique profile.

Features + Benefits


- Complete synchronized transmission
- Light drive system
- Calm and smooth drive

(1)TN15 TYPE

Dimensions



Size code

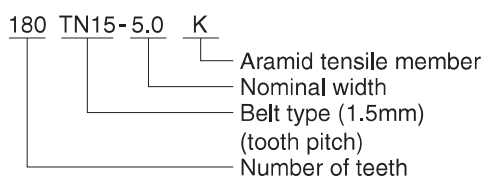


Standard Sizes


BELT NUMBER	Pitch length (mm)	number of teeth	BELT NUMBER	Pitch length (mm)	number of teeth
43TN15	64.5	43	270TN15	405.0	270
50TN15	75.0	50	271TN15	406.5	271
60TN15	90.0	60	290TN15	435.0	290
63TN15	94.5	63	298TN15	447.0	298
79TN15	118.5	79	300TN15	450.0	300
82TN15	123.0	82	310TN15	465.0	310
100TN15	150.0	100	320TN15	480.0	320
110TN15	165.0	110	330TN15	495.0	330
114TN15	171.0	114	334TN15	501.0	334
120TN15	180.0	120			
130TN15	195.0	130	339TN15	508.5	339
131TN15	196.5	131	340TN15	510.0	340
140TN15	210.0	140	350TN15	525.0	350
			360TN15	540.0	360
			370TN15	555.0	370
150TN15	225.0	150	380TN15	570.0	380
160TN15	240.0	160	390TN15	585.0	390
170TN15	255.0	170	400TN15	600.0	400
180TN15	270.0	180	421TN15	631.5	421
			441TN15	661.5	441
186TN15	279.0	186	460TN15	690.0	460
190TN15	285.0	190	480TN15	720.0	480
192TN15	288.0	192	481TN15	721.5	481
196TN15	294.0	196	828TN15	1242.0	828
200TN15	300.0	200			
220TN15	330.0	220			
230TN15	345.0	230			
240TN15	360.0	240			
250TN15	375.0	250			
260TN15	390.0	260			

(2)TN10 TYPE

Dimensions




Size code

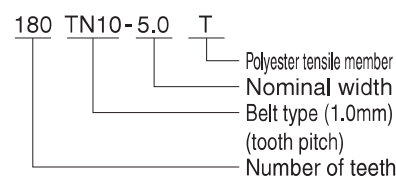













Standard Sizes

BELT NUMBER	Pitch length (mm)	number of teeth
50TN10	50.0	50
60TN10	60.0	60
80TN10	80.0	80
81TN10	81.0	81
90TN10	90.0	90
98TN10	98.0	98
100TN10	100.0	100
107TN10	107.0	107
110TN10	110.0	110
120TN10	120.0	120
130TN10	130.0	130
140TN10	140.0	140
150TN10	150.0	150
160TN10	160.0	160
170TN10	170.0	170
200TN10	200.0	200
250TN10	250.0	250
287TN10	287.0	287
310TN10	310.0	310

BANDO AUTOMOTIVE POWER TRANSMISSION BELTS

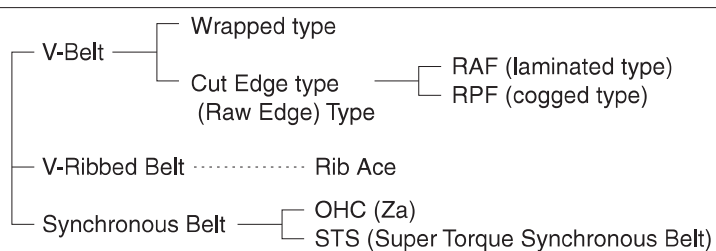

Features

		Sidewall wear resistance	Bending stress resistance	Noise level
 Wrapped type		Good	Good	Excellent
 RAF		Excellent	Good	Excellent
 RPF		Excellent	Excellent	Good
 RIB ACE		Excellent	Excellent	Excellent
 OHC SYNCHRONOUS BELT		Excellent	Excellent	Good
 STS		Excellent	Excellent	Excellent

Dimensions and available Size Range

Belt type	Bando profile & Size code	Top width	Thickness	Angle	Size range
V-Belts	FM 2000	9.5mm (0.38")	8.0mm (0.32")	35°	508mm-1524mm 20"-60" Outside length
	HA 4000	12.5mm (0.50")	9.5mm (0.38")	35°	800.1mm-1651mm 31.5"-65" Outside length
	A 3000	13.0mm (0.50")	8.0mm (0.32")	35°	508mm-2032mm 20"-80" Inside length
	B 5000	17.0mm (0.66")	11.0mm (0.44")	35°	508mm-2032mm 20"-80" Inside length
	BC 9000	20.0mm (0.80")	11.0mm (0.44")	35°	508mm-2540mm 20"-100" Inside length
	C 7000	22.0mm (0.88")	14.0mm (0.56")	35°	508mm-2540mm 20"-100" Inside length
	CD 8000	25.5mm (1.00")	14.0mm (0.56")	35°	508mm-2540mm 20"-100" Inside length


Belt type	Bando profile & Size code	Rib pitch	Thickness	Size range
V-Ribbed Belts	PK	3.56mm (0.14")	4.8mm (0.19")	20"-100" (500mm-2540mm) Refer to Bando Automotive Belt Catalog

Belt type	Bando profile & Size code	Tooth pitch	Teeth	Size range
OHC Synchronous Belt	ZA	9.525mm (0.375")	54-102	Refer to Bando Automotive Belt Catalog
	ZB	9.525mm (0.375")	84-134	

Belt type	Bando profile & Size code	Tooth pitch	Thickness	Size range
Super Torque Synchronous Belts	S8M	8.0mm (0.315")	5.2mm (0.21")	Refer to Bando Automotive Belt Catalog


APPLICATION OF BANDO POWER TRANSMISSION BELTS IN DIFFERENT INDUSTRIES.

CARS & MOTORBIKE

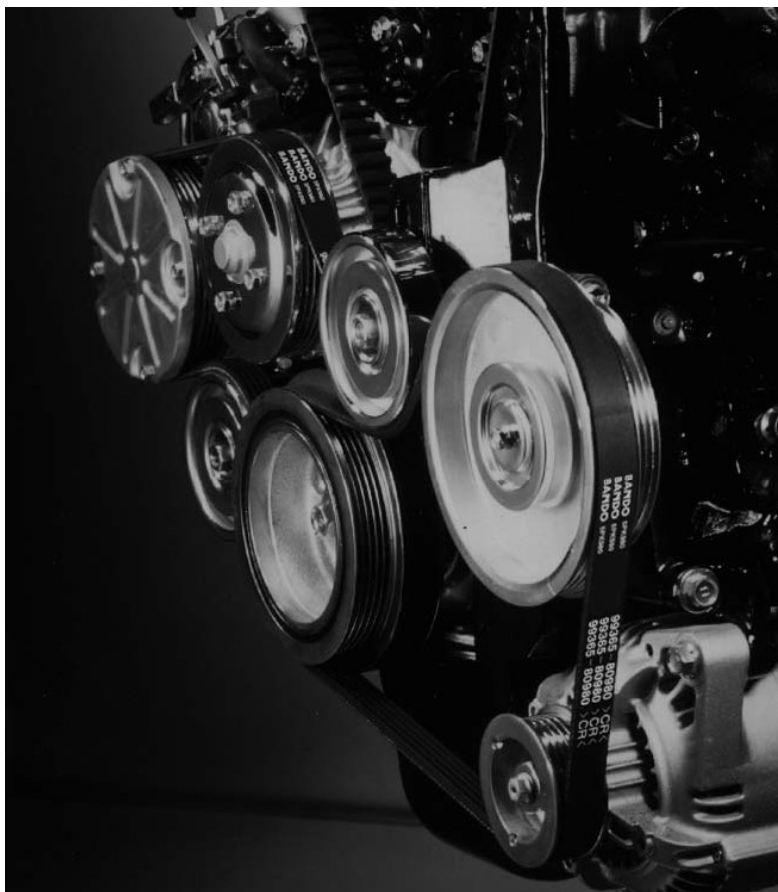

◀ Rib Ace
5PK 980
Automotive belt

▼ Automotive belt
for bus
HDPF
Raw edge

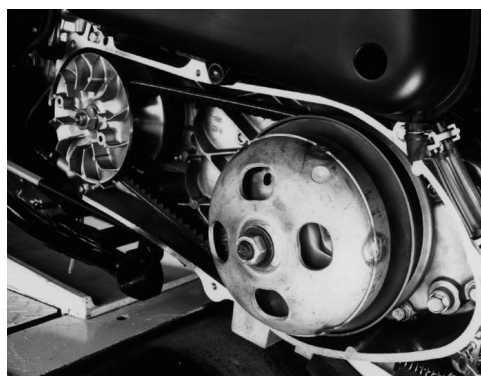

◀ Variable speed belt
for motor bike




◀ for motor bike
Variable speed belt



◀ for Automotive
Rib Ace belt
4PK 1542

▼ for Automotive
STS belt
S8M 560


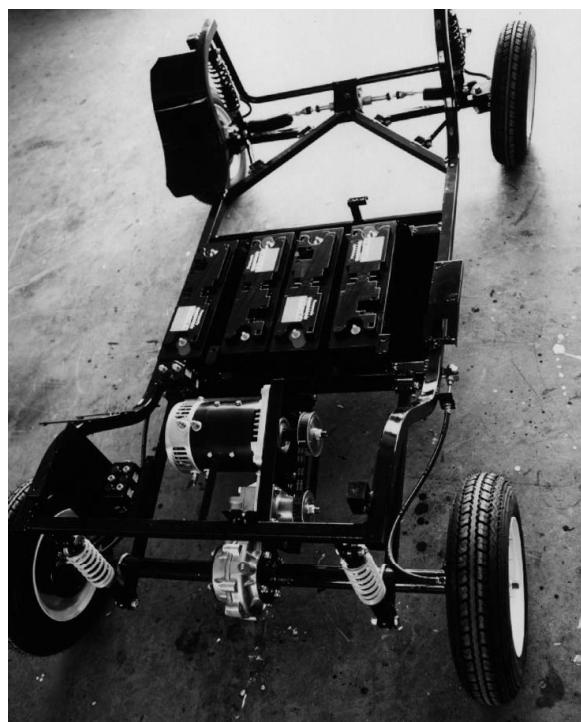


AGRICULTURAL MACHINERY



◀ combine
VBelt Red-S II
single drive

V/S Belt ▶
29.34-994

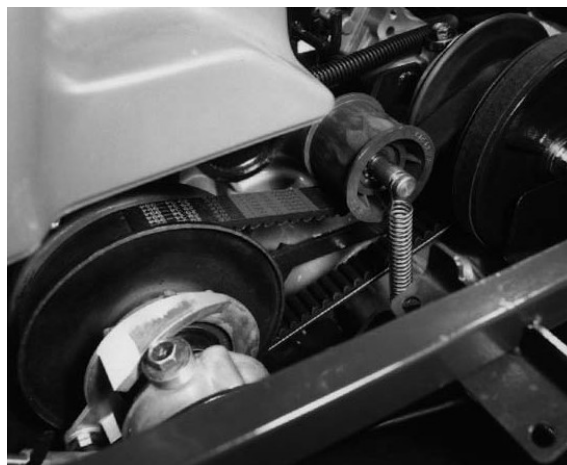


◀ combine
all drives

HOUSEHOLD APPLIANCES

Video camera ▶
TN 10×1pc.



OFFICE EQUIPMENT



◀ printer

▼ a copying machine
STS 60 S3M537



OTHER MACHINERY





◀ KPS belt
S8M1152
injection molding



automatic door ▶
LSB-U

▼ light conveyance
LSB-U with profile

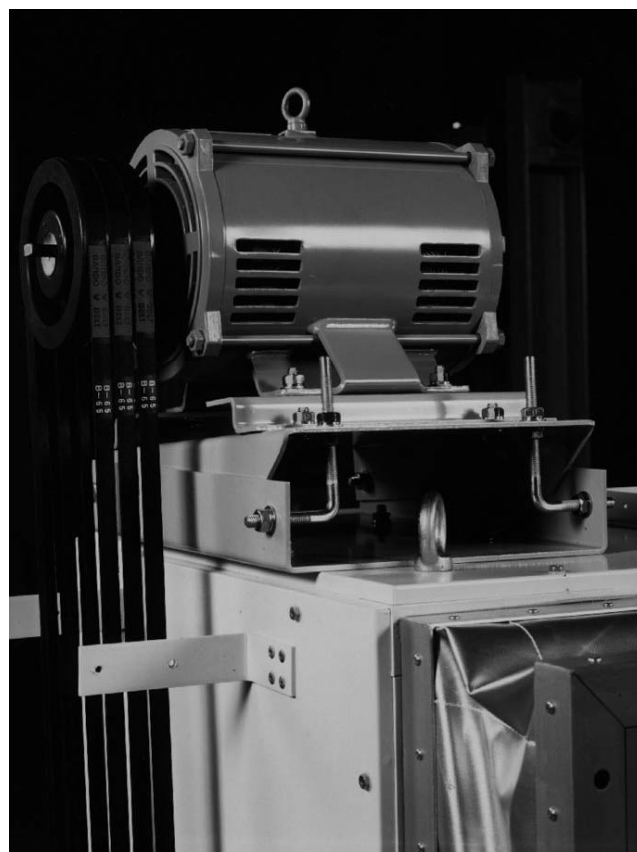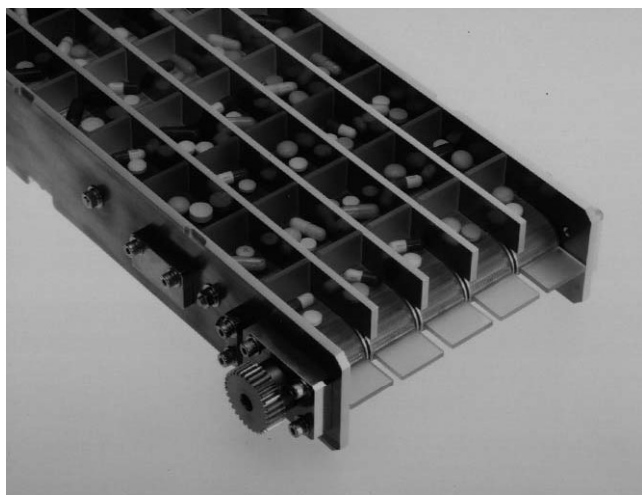

Ventilator ▶
Multiple V Belts red B-65


BANDO POWER TRANSMISSION BELT TROUBLE SHOOTING MANUAL

OPERATING AND MAINTENANCE

CONSTRUCTION

V-BELT

The accompanying diagrams show the simple construction of a belt. Each belt has four components.

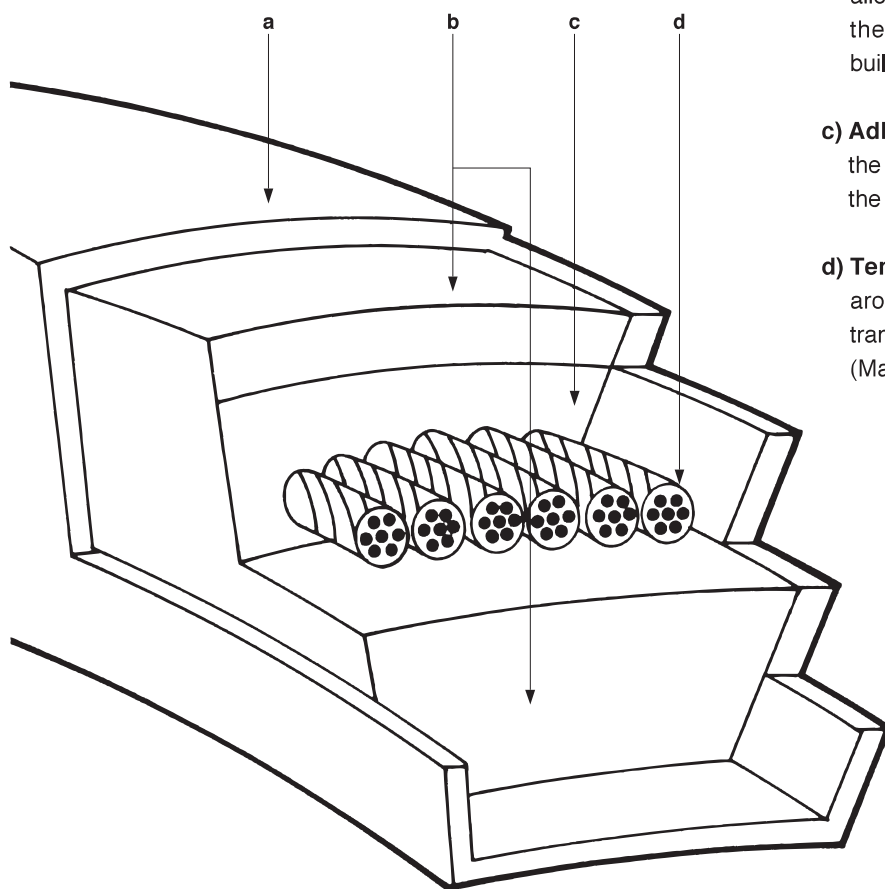

a) Cover: A canvas cover is usually wrapped completely around the belt, sometimes only on the top and bottom. It provides the proper amount of traction and protects the internal components from oil, dust and other foreign materials.

It also increases belt flexibility.

b) Cushion Rubber: The material surrounding the Tensile Member. It absorbs the power from the power (pulley) and helps transmit this power to the driven sheave. Its high elasticity allows smooth bending and flexing over even the smallest pulleys while preventing heat built-up. It is made of synthetic rubber.


c) Adhesion Rubber: Sets the tensile cords in the right place and firmly bonds the cords with the cushion rubber.

d) Tensile Member: Cord like material running around the belt. The 'muscles' of the belt, it transmits power from one sheave to the next, (Made of Tetron R)

SYNCHRONOUS-BELT

Also called a "Timing Belt". It consists of four components:

- a) **Rubber Backing:** A synthetic rubber layer which gives protection to the tensile member. It is tough and flexible and completely bonded to the tensile member. Its excellent wear resistant backing can also be used for light duty transportation.
- b) **Tensile Member:** Made of helically wound glass fiber cord, it is designed to transmit the power. The small diameter cord possesses high tensile strength, low stretch and high resistance to bending fatigue.
- c) **Rubber Teeth:** Special synthetic rubber which has high shear strength and adequate hardness. To ensure that the teeth are compatible with the pulley grooves, they are precision made with a highly accurate pitch. (When the teeth in mesh [TIM] is 6 or more, the teeth shear strength virtually exceeds the belt's tensile strength).
- d) **Nylon Facing:** A thin nylon cover cloth, tough with excellent abrasion resistance, protects the belt teeth from wear caused by pulley contact. This gives long belt service life.

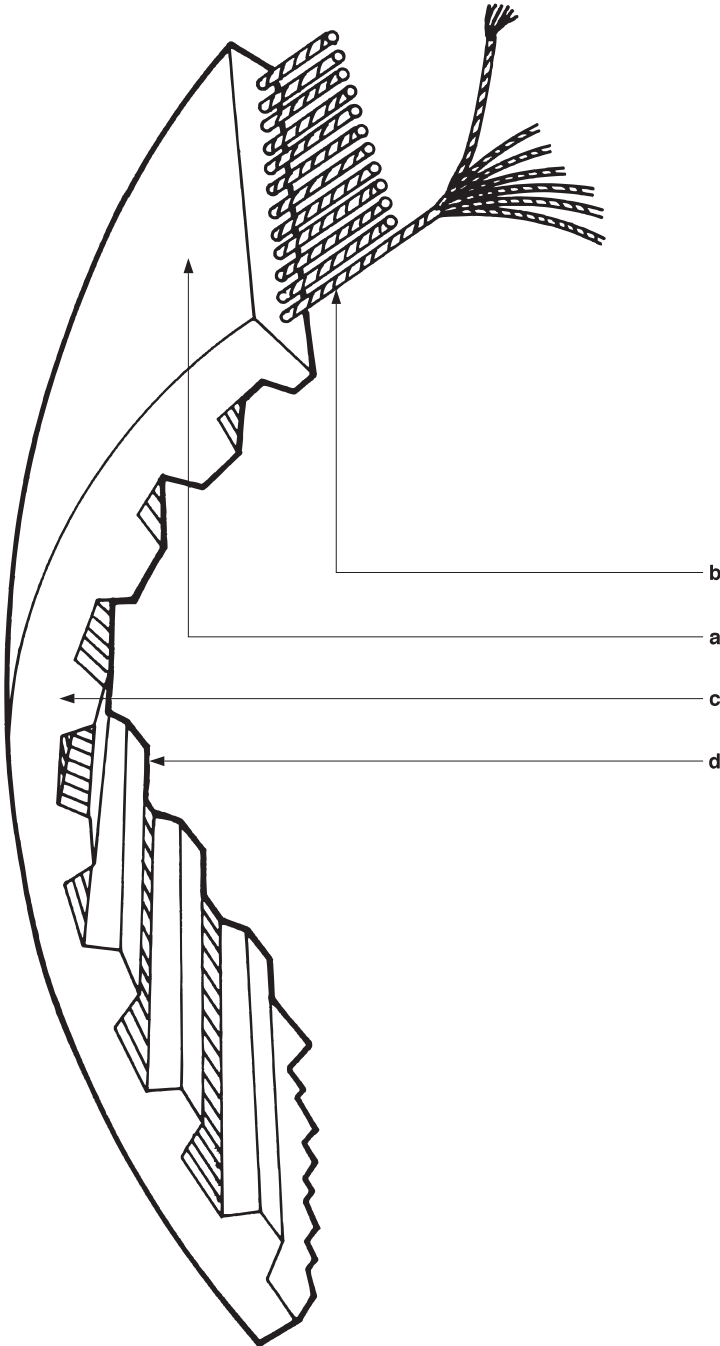

INSTALLATION


USE THE RIGHT TYPE OF BELT

Normally you will know because the old belts will be labeled. However, if you cannot read the labels, use Bando Belt and pulley Gauges.

USE A MATCHED SET


From the same manufacturer, belts from different manufacturers can have different characteristics. Slight differences between belts causes strain and shortens belt service life.

When installing new belts, always replace all the belts. Old belts become worn and stretched from use; if old and new belts are mixed, the new belts will do more work and as a result will fail early.

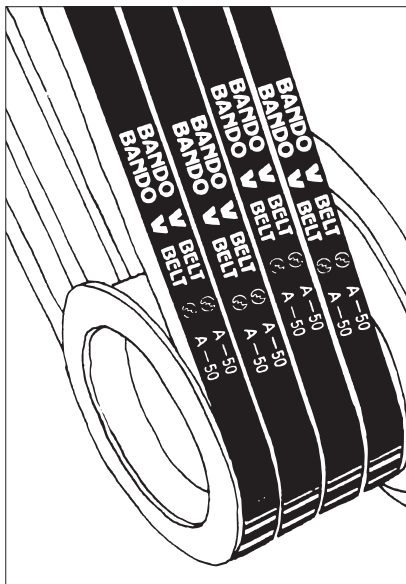


SAFETY

Make sure that all equipment is turned off, even if you are only going to touch it for a moment.

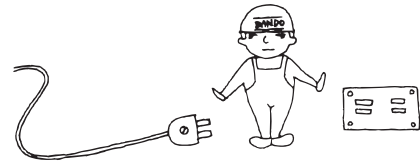


The drive should be fully protected by a guard.

This not only ensures safe operation but also protects the drive from debris and keeps the belt running smoothly.

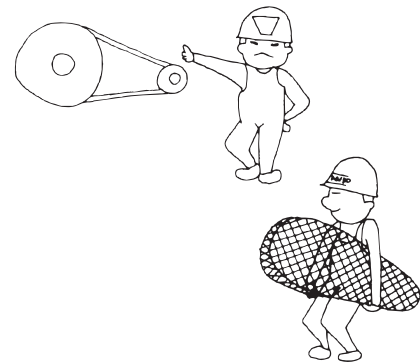

SHEAVES

Should also be checked and worn ones replaced. Any rust should be removed from the sheave surface. It accelerates belt wear. Paint or wax should never be applied to the sheave grooves.

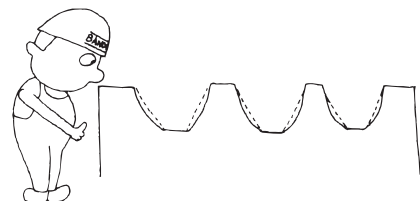


INSTALLATION

SHEAVE MOUNTING AND ALIGNMENT

Unless belts enter and leave sheave in a relatively straight line, wear is accelerated. In Diagram 1 the shafts of the two drives are not parallel. In Diagram 2 although the shafts are parallel the sheaves are incorrectly aligned.


Use a steel straight edge to ensure correct alignment.

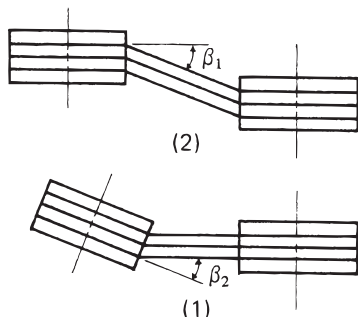

BELTS MUST NOT BE PRISED OR ROLLED ONTO THE SHEAVE

This damages the belt internally and greatly shortens belt service life.

Fingers can also be seriously injured if caught in the sheave. Always use the motor side (drive take up).

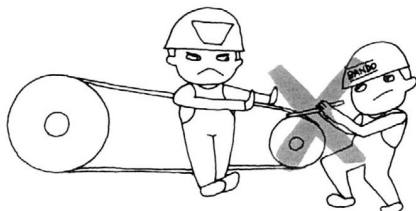


BELTS MUST BE CORRECTLY TENSIONED

The correct tension can be calculated from the slack and the load. Or the Bando tension meter can be used. The Optimum Tension is the lowest tension at which the belts will not slip under full load.

Over-and under-tensioning causes respectively, damage to the shaft bearings and belt slippage.

After installation the drive should be run for 15 minutes to seat the belts before peak load is applied.


If they slip tighten them, check frequently during first day of operation.

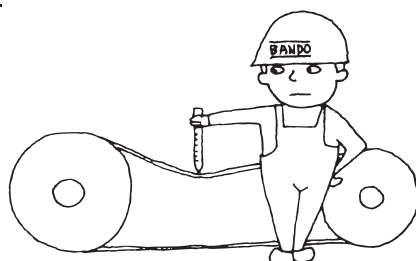

STORAGE

Poor storage causes belt deterioration. To prevent this the following conditions should be observed:

- a) Belts should be stored in a cool dark place, away from radiators and direct sunlight. Heat will dry out the belts and cause them to become brittle and hard. Optimum conditions, temperature below 85°F (30°C), relative humidity below 70%.
- b) Belts may be stored either by coiling them on shelves, or hanging them on wide supports or multiple hooks. (Avoid laying them on the floor)
- c) Ensure that no oil or chemicals come into contact with the belts.

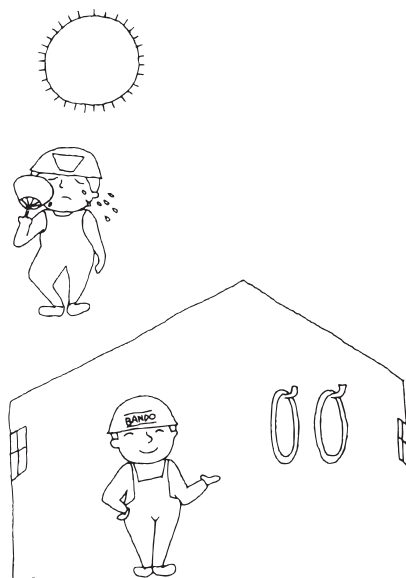

TROUBLESHOOTING

TROUBLE AREA	CAUSE	REMEDY
BELTS STRETCH BEYOND TAKE UP		
Belts stretch unequally.	Misaligned drive.	Realign and re-tension the drive.
	Belts damaged during installation.	Replace with a matched set, properly installed.
Belts stretch about equally.	Insufficient take up allowance.	Check take up allowance in manual.
	Greatly over-or under loaded drive.	Redesign using manuals.
SHORT BELT LIFE		
Relatively rapid failure no visible reason.	Underdesigned drive.	Increase the number of belts, use a wider belt, a high-power transmission belt or redesign using manual.
	Sheave diameter too small.	Redesign using manual.
	Belt runs on to sheave flange, due to misalignment.	Redesign using manual.
	Worn sheave grooves.	Replace sheaves.
	Belt damaged through improper installation.	Replace with matched set properly installed.
	Foreign substance caught between belt and sheave.	Shield the drive.
Sidewalls soft, sticky, and wollen, low adhesion between cover plies.	Oil or grease on belts or sheaves.	Remove source of oil or grease. Clean surfaces.
Sidewalls dry and hard, low adhesion.	High temperatures.	Remove heat source, ventilate drive better.
Belt bottom cracked	Sheave diameter too small.	Redesign using larger sheaves.
	Back side idler-pulley diameter too small.	Replace with an inside idler-pulley, or redesign.
	High temperatures.	Remove heat source, improve ventilation or use a heat resistant belt.
	Belt slipping because of insufficient tensioning.	Re-tension.
Belt bottom cut	Improper storage.	Store belts properly.
	Belt ran off the sheave.	Check tension and alignment.
	Foreign material fell into drive.	Install drive shield.
	Improper installation.	Install new belts properly.
Deterioration of rubber in belt.	Belt dressing.	Never use dressing on V-belts.

TROUBLESHOOTING

TROUBLE AREA	CAUSE	REMEDY
Extreme cover wear, worn corners.	Dust attached to belt.	Clean surfaces and re-tension. Install shield.
	Belt loosely tensioned.	Re-tension.
	Too few belts.	Increase belt quantity.
	Sheave grooves rusted.	Remove rust or replace sheave.
	Sharp corners or burrs on sheaves.	Round corners and remove burrs with a file.
	Sheaves misaligned.	Re-align.
	Angle of sheave groove incorrectly finished or badly worn.	Replace sheave with a new one, with suitable groove angle.
	Outside diameter of right and left side of the sheave differs.	Replace with an accurately machined one.
Spin burns on belt.	Belt slips under starting or stalling load.	Tighten belt until slipping stops.
	Belt too loose.	Adjust belt tension.
	Sheave diameter too small.	Replace sheave or use suitable belt.
	Belt load miscalculated.	Increase number of belts, or use high power transmission capacity belt.
	Water or oil on the belt.	Install belt cover. Completely wipe the belt clean.
Belt irregularly deformed.	Belts were piled up or bent when stored.	Store belts by hanging them or by coiling on shelves.

BELT TURNOVER

	Excessive lateral belt whip.	Use high power transmission capacity belt.
	Foreign material in grooves.	Install belt cover.
	Misaligned sheaves.	Realign.
	Worn sheave grooves (use gauge).	Replace.
	Belt loosely tensioned.	Adjust tension.
	Belt deformed by fluctuating load.	Replace with scrum, flat, or poly-V-belt.
	Belt damaged through improper installation.	Replace with matched set, properly installed.
	If multi-strand driven, belt lengths differ.	Replace belts with a matched set.

BELT VIBRATES

	Incorrectly placed flat idler pulley.	Carefully align idler on flat side as close as possible to drive shaft.
	Distance between shafts is too long.	Install an idler.
	Belt too loose.	Re-tension.
	Belt lengths uneven.	Replace with a matched set.

TROUBLESHOOTING

TROUBLE AREA	CAUSE	REMEDY
BELT MEANDERS BELT NOISE		
	Sheaves are misaligned.	Realign.
	Belt slips because of under tensioning, start up or stopping time too abrupt.	Re-tension. Lengthen start up and deceleration time. Drive slower.
	Too few belts.	Increase belt quantity.
	Belt type unsuitable.	Replace with wrapped V-belt.
IMPROPER DRIVEN SPEED		
	Design error (incorrect ratio between drives).	Use correct sizes.
EXCESSIVE SLIPPING		
	Spin burns on belt.	Re-tension drive until slipping stops.
	Too few belts.	Increase belt quantity.
	Contact angle too small.	Install back side idler pulley on slack side or use synchro belt.
	Water or oil on the belt.	Install belt cover, and clean surfaces.
HOT BEARINGS		
Drive overtensioned.	Worn-grooves, belts bottoming.	Replace sheaves, re-tension drive.
	Improper tensioning.	Re-tension.
Sheaves too small.	Design error.	Redesign using manuals.
Poor bearing condition.	Bearings underdesigned and/or badly maintained.	Observe recommended bearing design and maintenance.
Sheaves too far out	Installation error or obstruction.	Place sheaves as close to bearings as possible, remove any obstructions.
Drive undertensioned.	Belt slipping, causing heat build up.	Re-tension drive.
SYNCHRONOUS-BELT:		
Teeth broken off	Belt skips pulley teeth because its undertensioned.	Re-tension.
	Pulley teeth poorly machined, or badly worn.	Replace pulley with correctly machined one. If dust on teeth surfaces install cover.
	Equipment stopping too quickly.	Increase deceleration time, or use a stronger belt.
	Fewer than specified belt teeth are gripping the pulley teeth.	Install back side idler on slack side of belt, or redesign.

TROUBLESHOOTING

TROUBLE AREA	CAUSE	REMEDY
Belt becomes stiff and cracks generate over the surface of belt.	Ambient temperature is excessively high. (over 90°C)	Decrease the temperature or use heat-resistant belt.
Belt breaks off without leaving any fatigue.	Power transmission capacity of belt is insufficient.	Use a wider belt, increase the diameter of pulley, or trace the belt selection procedure again.
	Belt is unnaturally bent.	Pay much attention to the maintenance or handling of the belt.
	Belt is installed by forcible wrenching.	Install the belt by loosening the pulley slide or the tension pulley.
	Foreign substance is caught in.	Install a belt cover.
	Belt runs on to the flange of pulleys due to the excessive misalignment of pulleys.	Align the pulleys.
One or both edges of belt are worn out or broken off.	Pulleys are misaligned.	Align the pulleys.
	The outside diameter of right and left side pulleys differ.	Replace the pulley with an accurately machined pulley.


POWER BAND BELT:

Tie band separation belt riding out of sheave groove	Worn sheaves (check with gauge)	Replace with new sheaves.
	Misalignment of sheave.	Realign.
	Lack of tension.	Re-tention.
	Foreign object forced belt out.	Remove any interference.
	Riding outside and above sheave grooves.	Properly maintain drive, and install belt correctly.
All belts separated from tie band.	Drive shield loose and interfering with belt.	Adjust shielding.
	Worn idler sheave.	Replace.
Top of tie band frayed	Obstruction on machine.	Realign drive and remove obstruction.
Tie band top blistered	Foreign material accumulating between belts of power band.	Check shielding on drive.
Bottom of belt cracking.	Belt slipping causing heat build up and gradual hardening of undercord.	Check tension of power band.


EXAMPLES OF POWER TRANSMISSION BELT TROUBLE

The typical examples of power transmission belt trouble are presented below. These troubles are the result of faulty designing, handling or machining of belts and sheaves.


1. Cracks at the bottom of belt

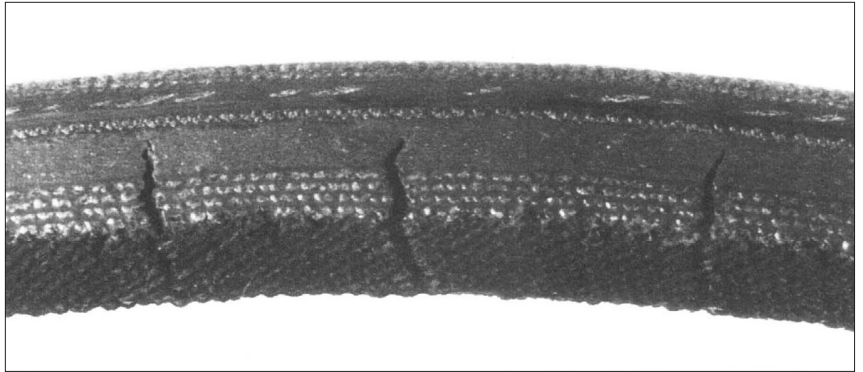

2. Break off of Belt

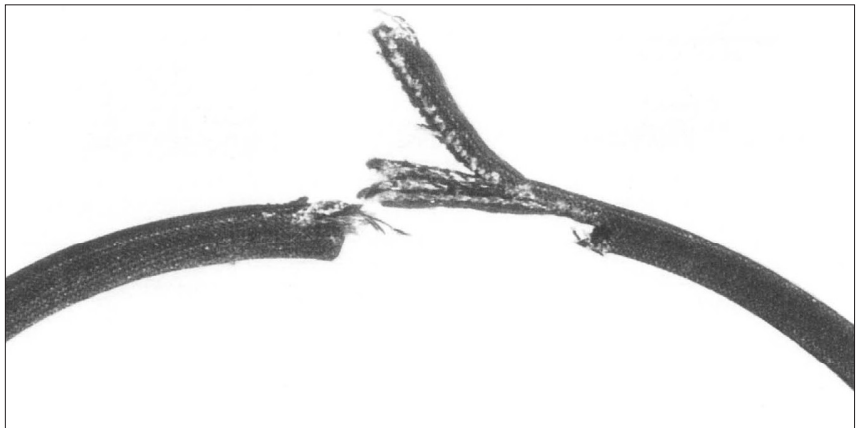


3. Twisting of belt

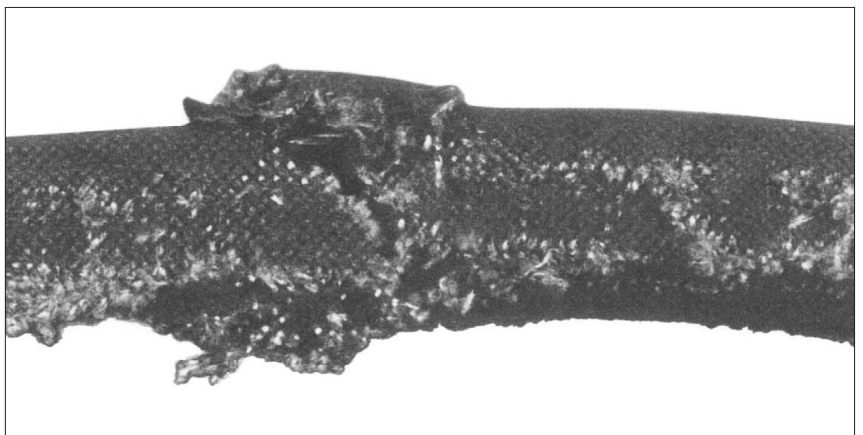

EXAMPLES OF POWER TRANSMISSION BELT TROUBLE


4. Side wear of belt

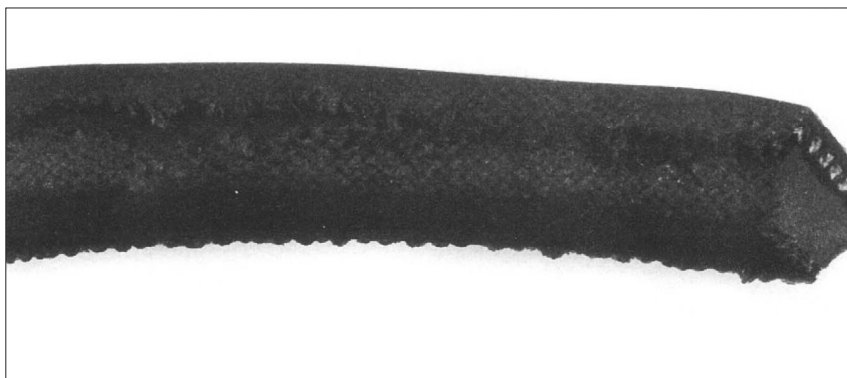


5. Break off of Belt



6. Cracks on the belt surface

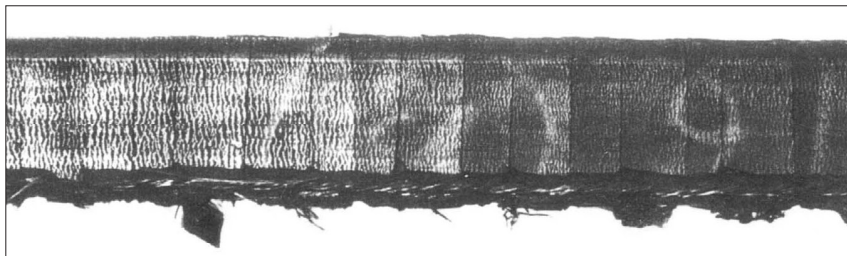


7. Side wear of belt

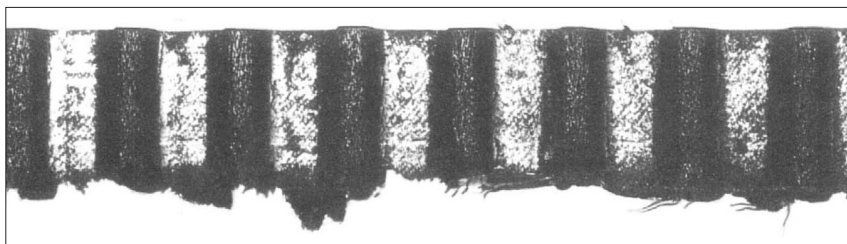

Belt Design Factors

(Fill in the blanks and consult with Bando.)

1	Machine type										
2	Service factor	1.01.11.21.31.41.51.61.71.81.92.02.12.2 2.32.42.52.62.72.82.93.0									
3	Type of drive	Motor	Engine	Normal: Max:	(PS. KW. kg-m, kg-cm)						
4	Transmission characteristics	Horsepower constant			Torque constant		Operating hours/Day(hrs.)				
5	Speed ratio	Acceleration, Reduction			:		Pulley layout Describe separately if details are required.				
6	Drive pulley	Outer dia. (mm) × (r.p.m.) Pitch dia.									
7	Driven pulley	Outer dia. (mm) × (r.p.m.) Pitch dia.									
8	Tension pulley	Yes No	(φ)	inside outside	slack side tight side						
9	Center distance	± (mm)									
10	Drive system	Ordinary  Horizontal  Vertical 									
11	Sudden stop	Sudden stop Yes No		Brake: Input side Output side		Time from sudden stop to sudden start or vice versa. (sec) GD2: (kg-m-sec2)					
12	Pulley space	Any restriction:									
13	Special requirement (Circle items and describe in detail.)	Heat resistance, Oil resistance, Cold resistance, Moisture resistance, Low noise, static conductive, Insulation, Others (Speed-up, Compactness, Vibration Non-slip, Light weight etc.) Details									
14	Belt Service Life desired	(hrs.)		Service condition: outdoor, dusty, others							
15	General Information on Belts now used.	Manufacturer: Total quantity: Belt service life				Type: Quantity by size: Any problems:					

Bando reserves the right to change product design, size, specifications, and materials at any time without obligation of replacement or refund on any products or parts there of which may be in any customers' possession at the time such changes become effective. Bando Chemical Industries, Ltd. shall not be liable for any damages and/or injuries whatsoever caused by any usage of the belts in this brochure for purposes other than power transmission.



BANDO CHEMICAL INDUSTRIES, LTD.

2005.2

JAPAN	Overseas business contact; INTERNATIONAL BUSINESS 2-21, Isogami-dori, 2-chome, Chuo-ku, Kobe 651-0086, JAPAN TEL.81-78-232-2815 FAX.81-78-232-2907 E-Mail. int.business@bando.co.jp		
NORTH AMERICA	BANDO USA, INC. <Corporate Office> 1149 West Bryn Mawr, Itasca, Illinois 60143, U.S.A. TEL.1-630-773-6600 FAX.1-630-773-6912 <Bowling Green Plant> P.O.Box 10060, 2720 Pioneer Drive, Bowling Green, Kentucky 42102-4860, U.S.A. TEL.1-270-842-4110 FAX.1-270-842-6139	ASIA	P.T.BANDO INDONESIA Jl. Gajah Tunggal, Kel. Pasir Jaya, Kec. Jati Uwung, Tangerang, 15135 INDONESIA TEL.62-21-5903920 FAX.62-21-5901274 BANDO MANUFACTURING (THAILAND) LTD. 47/7 Moo 4, Soi Wat Bangpla, Tambol Bankao Amphur Muang, Samutsakorn 74000 THAILAND TEL.66-3446-8422 FAX.66-3446-8415 DONGIL BANDO CO., LTD. 626-220 869-1, Eogok-Dong, Yang San City, Gyung Sang Nam-Do, REPUBLIC OF KOREA TEL.82-55-371-9200 FAX.82-55-388-0087 PENGELUARAN GETAH BANDO (MALAYSIA) SDN. BHD. NO.2, Jalan Sengkang, Batu 22, Kulai 81000, Kulai, Johor, MALAYSIA TEL.60-7-663-5021 FAX.60-7-663-5023 BANDO JUNG KONG, LTD. 48a-705 (Shiwha Indus. Zone, Mechatronics Complex), Songgok-Dong, Ansan City, Kyongki-Do, REPUBLIC OF KOREA TEL.82-31-432-9800 FAX.82-31-432-8198 BANDO SIIX LTD. Room 2201-2, Shun Tak Centre, West Tower, 200 Connaught Road Central, HONG KONG TEL.852-2494-4815 FAX.852-2481-0444 BANDO BELT (TIANJIN) CO.,LTD. No.37 of Hei Tong Avenue, TEDA, Tianjin 300457, CHINA TEL.86-22-66237077 FAX.86-22-66237036 BANDO (SHANGHAI) INTERNATIONAL TRADING CO.,LTD. Rm.9111, World Trade Tower, No.500 Guandong Road, Shanghai, CHINA 200001 TEL.86-21-5353-0750 86-21-6362-0077 FAX.86-21-5353-1058 BANDO (INDIA) PRIVATE LIMITED 26, Sector 34, EHTP, Gurgaon - 122001 (Haryana) INDIA TEL.91-124-5034-091 FAX.91-124-5034-094
EUROPE	BANDO EUROPE GmbH Nikolaus Strasse 59, D-41169 Moenchengladbach, FEDERAL REPUBLIC OF GERMANY TEL.49-2161-90104-0 FAX.49-2161-90104-50 BANDO IBERICA, S.A. Apartado Correos 130, Poligono Industrial Can Roca, Carretera Nacional II Km. 578, 08292 Esparraguera (Barcelona) SPAIN TEL.34-93-777-8740 FAX.34-93-777-8741 BAND KOCKAYA KAYIS SANAYI VE TICARET(TURKIYE) A. S. Ihasan Dede Cad. 1000 Sokak, Gebze Organize Sanayi Bolgesi, 41480 Gebze, Kocaeli, TURKEY TEL.90-262-751-1691 FAX.90-262-751-1698		
ASIA	BANDO (SINGAPORE) PTE., LTD. 3C Toh Guan Road East, #05-01 SINGAPORE 608832 TEL.65-6475-2233 FAX.65-6479-6261 PHILIPPINE BELT MFG. CORP. C.P.O. Box 205, 2nd Floor, Siemkang Building 280-282 Dasmarinas Street Binondo, Manila 1099, PHILIPPINES TEL.63-2-241-0794 FAX.63-2-241-3279 KEE FATT INDUSTRIES, SDN. BHD. NO.2, Jalan Sengkang, Batu 22, Kulai 81000, Kulai, Johor, MALAYSIA TEL.60-7-663-9661 FAX.60-7-663-9664 SANWU BANDO INC. 11FL-2, No.51, Sec. 1, Min Sheng E. Road, Taipei, TAIWAN TEL.886-2-2567-8255 FAX.886-2-2567-2710		

OBE19-260