



BANDO Long Synchronous Belt (Polyurethane)

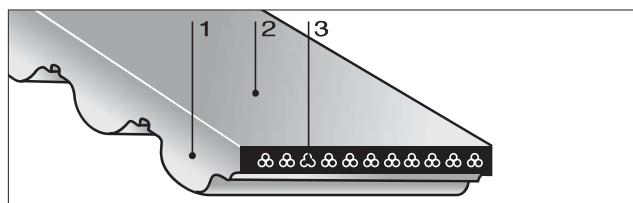


Bancolan Long STS Belt

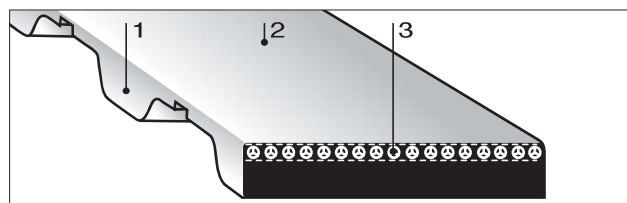

Bancolan Long Synchronous Belt

Dimensions

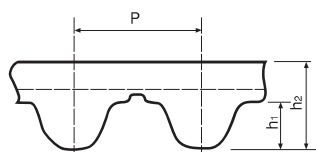

Unit: mm () Dimension in seamless

Model	P	h1	h2
S2M	2.00	0.76	1.40
S3M	3.00	1.14	2.00
S5M	5.00	1.77	3.20
S8M	8.00	2.85	5.00

Construction

- 1: Polyurethane teeth
- 2: Polyurethane backing
- 3: Core wire

Features + Benefits


The polyurethane construction of these long span belts make them ideally suited for synchronous transmission and conveyance in food processing machinery and other applications requiring a clean, dust-free drive.

- long-span belts capable of synchronous transmission and synchronous conveyance.

Open-end

- Capable of accurate reciprocating motion in indexing applications.

Size material code

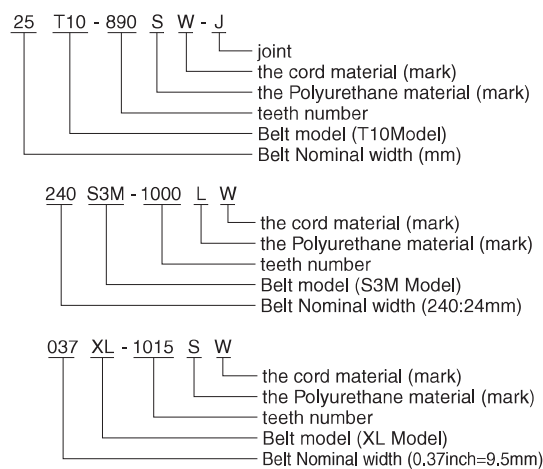

Standard Sizes

Endless (With Joints)					Openend			
Model	Standard Nominal width	Maximum Nominal width	Maximum length(m)	Minimum length(m)	Model (m)	Standard Nominal width	Maximum Nominal width	Max length(m)
S5M	100,150,200,250,300,400,500	50(500)	50	0.5	S2M	50,100,150,200,250,300,350,400	40(400)	60
S8M	150,200,250,300,400,500	100(1000)	30	1.0	S3M	60,120,180,240,300,360,420,480	48(480)	60
XL	025,031,037,050,075,100,150,200	50.8(200)	50	0.5	S5M	100,150,200,250,300,400,500	50(500)	50
L	050,075,100,150,200	50.8(200)	50	0.5	S8M	150,200,250,300,400,500,750,1000	100(1000)	30
H	075,100,150,200,300,400	101.6(400)	50	0.5	XL	025,031,037,050,075,100,150,200	50.8(200)	50
T5	10,15,20,25,30,40,50	50	50	0.5	L	050,075,100,150,200	50.8(200)	50
T10	15,20,25,30,40,50,75,100	100	50	0.5	H	075,100,150,200,300,400	101.6(400)	50
				2.0	T5	10,15,20,25,30,40,50	50	50
					T10	15,20,25,30,40,50,75,100	100	50